Safi Engineering Services

Perkins® Dealer

SAFI ENGINEERING SERVICES

PROPOSAL TO

OPERATION & MAINTENANCE SERVICES OF GENERATORS

TABLE OF CONTENTS

Section 1
Company Profile
Company Info 2

Section 2
Organizational Chart
Key Personnel Chart 3
All Key Personnel 4

Section 3
Company License
Company License Copy 5
Perkins License 7

Section 4
Services
Services All Over Afghanistan 8

Section 5
Operation Section
Operation Section Workflow 0

Section 6
Maintenance Section
Refill Capacities 0
Maintenance Interval Schedule 0

Section 7
Reply to ..... General Requirement for Maintenance Work
Reply to ..... Questions (Generators) 0
Reply to .....Questions (Major Over Hauling) 0

Section 8
Safety Rules
Safety Messages 0
General Hazard Information 0
Burn Prevention 0
Fire Prevention and Explosion Prevention 0
Crushing Prevention and Cutting Prevention 0
Mounting and Dismounting 0
Before Starting Engine 0
Engine Starting 0
Engine Stopping 0
Electrical System 0

Section 9
Warranty Section
Warranty Information 0

Section 10
Past Performance Details
Copies of all Past Performance 0
Contract Letters..... 0
Previous Client List 0

Section 11
Bank Details
Bank Statement 0
Bank Financial Reports 0

Section 12
Conclusion
Conclusion 0

COMPANY INFO

Safi Engineering Services established in 2002 one of the fastest growing and registered company in Afghan Government .SES one of leading specialist suppliers of generators sets, Perkins Engine, Perkins genuine Parts, Filters, fuel tanks, Electrical equipment, cables, distribution boards, and change over switch, Automatic panels ATS, ATYS, Synchronisation systems Immediate service and support is available 24/7 hours a day Professional Teams of Engineers and technicians are helping to keep S-E- Services unique. Our capabilities are ranging. The power needs of any Size from small Building to a multi-stories building can be met by our generators and equipment our generators range from 10KVA up to 2500 KVA with the ability to supply even larger loads through paralleling multiple units. In an emergency we can respond promptly.

OUR CORE VALUES

Passion, Respect, Integrity, Discipline, Excellence

OUR MISSION

- To build long term partnerships with our customers found on trust generating mutual growth and success through our commitment.
- To achieve our vision through providing our customer with quality products and professional services that exceeds their expectations.
- To partner with our suppliers to provide innovation timely and mutually profitable solutions for our customers.
- To employ dedicated well trained people and to provide them with a safe workplace that embraces integrity and teamwork resulting in a highly competent and motivated workforce.

OUR GOAL

Safi Engineering services one of leading specialist suppliers of generators Spare Parts, Filters, Oil, Engine, fuel control system A.C Alternators Generator's Auto control board ECM Automatic change over swatches ATS, ATI, Synchronization systems in Afghanistan. Our customer with professional and added value products and services solutions and after sales services at completive prices. Our goal is satisfaction of our clients and a give them our best level of services.

Telephone Nos: 0093(0)780 006 7000 - 777 258 366 - 799 258 366 - 792 006 700

ORGANIZATIONAL CHART

KEY PERSONNEL CHART

Safi Engineering full Services Centre/ Workshop:

We have biggest workshop in center of Kabul in Jalalabad Road with excellent fully qualified Mechanical Engineer, Electrical Engineer and Technician. We have 58 Employers HR, Marketing Manager, Sale manager, Quality Assurance Engineer, mechanic Engineer, Technicians, Electrical Engineer, Computer Programmer and IT. We have three Excellent teams for outside maintains work on site by Site Engineer and Technician. We are doing complete Power Services like Maintenance, Repairing, overhauling ,assembling, Programming, Synchronizing, changing manual to Auto system, commission, and Services any type of Generators.

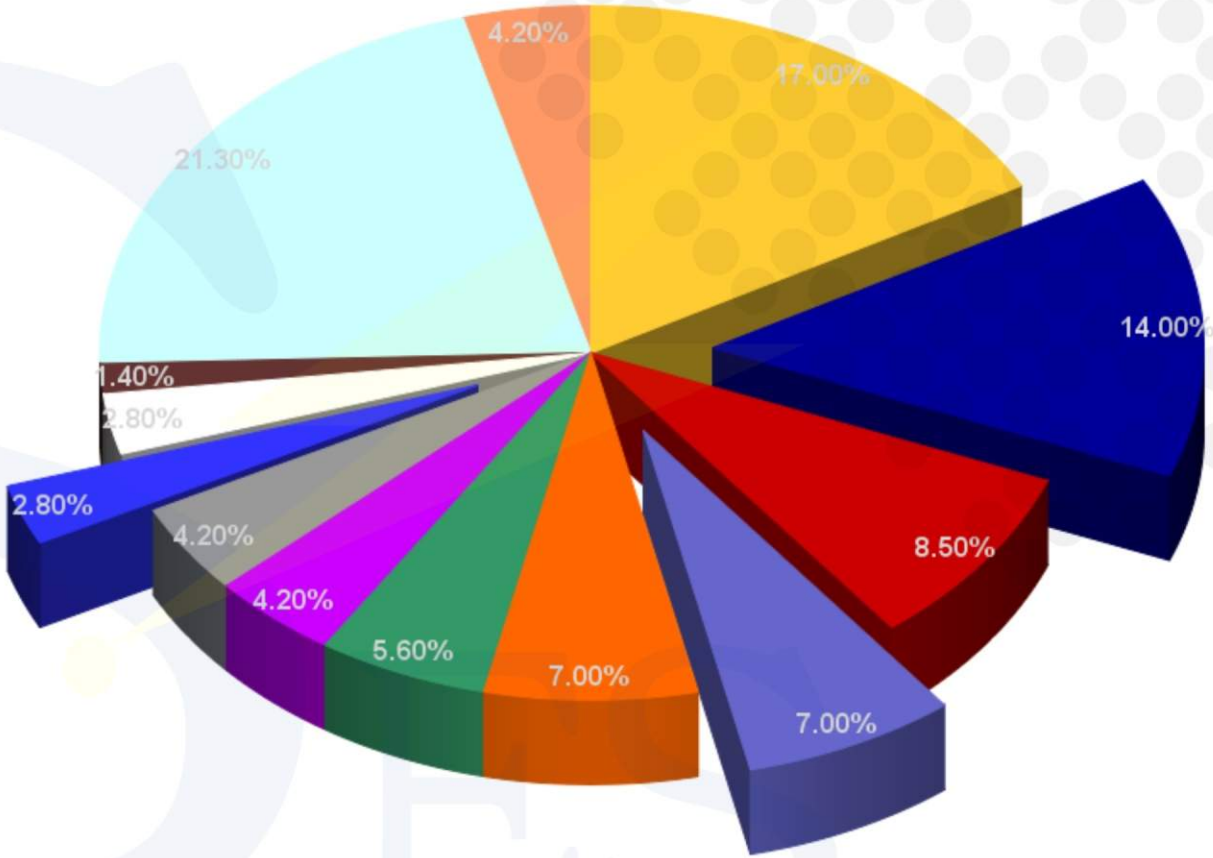

LEGEND

- WORKSHOP MECHANIC
- MECHANICAL ENGINEER
- SECURITY DEPARTMENT
- ELECTRICAL ENGINEER
- STOCK DEPARTMENT
- SALES DEPARTMENT
- MANAGEMENT DEPARTMENT
- ACCOUNTS DEPARTMENT
- ENGINEERING SUPERVISOR
- MARKETING DEPARTMENT
- IT
- MOBILITY TEAM
- COOK

ORGANIZATIONAL CHART

ALL KEY PERSONNEL

• Top Management •

Farid Shorori – President
Sahmasullah – Vice President

• Operation Department •

Samiullah Noori – Operation Manager

• Finance & Administrative Department •

Ahmad Suliman Akbary – Finance & Administrative Manager
Zemarai Sherzad – Finance Officer
Farida Sakhi Zada – Administrative officer

• Marketing Department •

Massoud Sharifi – Marketing Manager
Attiqullah Haidari - Marketing Officer

• Sales Department •

Mahboobullah Mirzada – Sales Manager
Abed Fowjhan – Sales Officer

تجدید

د افغانستان دپانګې اچونې دملاتړ اداره اداره حمایه سرمایه گذاری افغانستان

آیسا AISA

Afghanistan Investment Support Agency

جواز سرمایه گذاری خصوصی

License No: D-36669

Vice President

شمس الله ولد نصرالله

President

فرید ولد نصرالله

خدمات انجینری صفی

Safi Engineering Services

داجواز دپورتني نومول شوي سندلرونکي تصدیق کوي چه دافغانستان دخصوصي پانګې اچونې دقانون سره سم په‌آیسا کښې یوثبت شوی تشبث دی، چې دافغانستان د قوانینو او احکامومطابق فعالیت کوی.

این سند تصدیق می دارد که دارنده آن , تشبث خود را طبق احکام قانون سرمایه گذاری خصوصی افغانستان در دفتر آیسا ثبت نموده مطابق احکام قوانین افغانستان فعالیت می نماید.

This license certifies that its holder has registered his /her company in accordance with the Private Investment Law of Afghanistan, and operates in accordance with Laws of Afghanistan.

Date of Issue / تاریخ صدور

23/04/2014 / 1393/02/03

	1392/12/29	1393/12/28	تاریخ اعتبار:
Valid Date:	20/03/2014	19/03/2015	

President & CEO

COMPANY LICENSE

Grant of License: This License constitutes an agreement between an approved enterprise and AISA, pursuant to which, the approved enterprise may operate in the field specified, in accordance with the Investment Law and other commercial and financial legislation.

Obligation of License Holder: the holder of the license shall be obliged to comply with the Constitution, Law and Regulations of the Islamic Republic of Afghanistan. In case of any violation, AISA may terminate, confiscate, suspend, amend, nullify, invalidate or redistribute the license.

Prohibitions and Restrictions: Investment shall be prohibited in the field of nuclear energy, establishment of casinos, or similar establishments, production of drugs (narcotics) or other intoxicants, or other acts deemed a crime by the Penal Code. Investment in the fields of production and sale of weapons, ammunition and explosive, non-banking finance activities, insurance activities, natural resources and Infrastructure, including telecommunication facilities, pipeline construction and erection shall be subject to special (relevant) laws.

Reporting: A license holder shall be obliged to notify AISA of any change in its ownership, capital structure, or contribution of additional capital, address and structure of the company, commencement or delay in activities of the company and the reasons therefore. In addition, s/he shall submit the companies' annual report within 90 days of the end of the fiscal year to AISA (from 21st of March until 20 of June).

No Liability: AISA and its branches shall have no liability to any person, including a license holder, to compensate losses/damages which includes without limitation, loss of profit, delay or suspension of employment, losses in formation of business, harmful reliance (sic), consequential or incidental damage to a third person or any other material loss. In addition, nothing in this License shall be regarded as a guarantee or any other form of compensation for damages/Losses.

اعطای جواز: این جواز موافقتنامه ای است میان تشبث منظور شده و دفتر آیسا که به اساس آن تشبث منظور شده می تواند مطابق احکام قانون سرمایه گذاری و سایر قوانین تجارتی و مالی در عرصه مشخص فعالیت نماید.

وجایب دارنده جواز: دارنده جواز مکلف است قانون اساسی ، قوانین و مقررات دولت جمهوری اسلامی افغانستان را رعایت نماید. دفتر آیسا در صورت تخلف می تواند مطابق احکام قانون جواز را لغو، مصادره، تعلیق، اصلاح ،باطل، بی اعتبار یا مجدداً توزیع نماید.

ممنوعیت و محدودیت: سرمایه گذاری در عرصه های انرژی هستوی ، تاسیس قمار خانه و محلات مشابه آن و تولید مواد مخدرو سایر مواد نشه آور و سایر اعمالی که درقانون جزا جرم پنداشته شده ممنوع است. سرمایه گذاری در عرصه های تولید و فروش اسلحه ، مهمات و مواد منفلقه ، فعالیت های مالی غیربانکی ، فعالیت های بیموی ، منابع طبیعی و زیر بنا بشمول تاسیسات مخابراتی ، ساختمان و نصب پایپلاین ، تابع قوانین خاص میباشد.

راپور دهی: دارنده جوازمکلف است تا هرنوع تغییردر مالکیت ، ترکیب یا ازدیاد سرمایه ، آدرس و ساختار شرکت ، آغاز فعالیت شرکت ، تاخیر مدت و علل آن را به اطلاع دفتر آیسا برساند. علاوتاً در خلال مدت نود(۹۰) روز بعد از ختم سال مالی راپور سالانه شرکت ثبت شده را به دفتر آیسا ارسال نماید.(از اول برج حمل الی اخیر برج جوزا)

عدم مسولیت : دفتر آیسا و نمایندگی های آن در هیچگونه وقایع مسولیت جبران خسارات را نداشته که بدون محدودیت شامل خسارت مفادی ، وقفه یا تعلیق در شغل ، خسارت در شکل گیری تجارت ، اعتماد زیان آور ، پیامد ها و خسارات تصادفی به شخص ثالث یا زیان مادی دیگر به هیچ شخص بشمول دارنده جواز نمیباشد.
همچنان درین جواز هیچ چیز به عنوان تضمین و یا اشکال دیگر جبران ضرر تلقی نمی گردد.

شراکت	حقوقي بڼه:
سرک کابل-جلال آباد, بنانی, ناحیه 9 - ولایت: کابل -	تجارتي پته:
خدمات انجینری	د فعالیت ډول:
9000170457	د عوایدو د ټکس نمره:
20,000 US$ - 1,000,000 Afs	لومړنی پانګه:
1389/10/06	د پروژې د منظوری نېټه:

mayphil

Goatmill Road, Dowlais, Merthyr Tydfil, Mid Glamorgan, South Wales, United Kingdom CF48 3TF
Tel: (44) 1685 353220 Fax: (44) 1685 353221 Website: www.mayphil.co.uk

TO WHOM IT MAY CONCERN:

EFFECTIVE OCTOBER 11TH 2012

THIS LETTER IS TO CERTIFY THAT SAFI ENGINEERING SERVICES IS AN **AUTHORIZED PERKINS DEALER** IN THE COUNTRY OF AFGHANISTAN ON BEHALF AND FOR THE MAYPHIL ENGINE GROUP.

FOR ANY ASSISTANCE PLEASE CONTACT AT:

ADDRESS:
SAFI ENGINEERING SERVICES,
JALALABAD ROAD, IN FRONT OF ICIT INSTITUTE
BAINYI, KABUL, AFGHANISTAN
CONTACT: PAUL SWEENEY, COMPANY DIRECTOR

SAFI ENGINEERING SERVICES HAS THE RESPONSIBILITY TO PROMOTE, DISTRIBUTE, SALE AND OFFER TECHNICAL ASSISTANCE TO THE PRODUCTS OF PERKINS ENGINES GROUP, PARTS AND SERVICE.

SAFI ENGINEERING SERVICES HAS THE DIRECT SUPPORT AND TECHNICAL ASSISTANCE OF THE MAYPHIL ENGINE GROUP THE SOLE APPOINTED DISTRIBUTOR OF PERKINS PRODUCTS AND SERVICES IN AFGHANISTAN.

SAFI ENGINEERING SERVICES ALSO HAS PERMISSION TO USE BOTH THE PERKINS BRAND AND THE MAYPHIL BRAND IN THE COURSE OF THEIR APPOINTMENT.

mayphil Perkins

YOURS SINCERELY

R.MEDORA
MANAGING DIRECTOR
MAYPHIL ENGINE GROUP

Mayphil
Mayphil Industrial Estate,
Goat Mill Road, Dowlais,
Merthyr Tydfil, South Wales, CF48 3TF.
T: +44(0) 1685 353220
F: +44 (0) 1685 353221

Mayphil UK Ltd is part of M.E.G. The Mayphil Engine Group, established and registered in the United Kingdom 1966

PERKINS LICENSE

Safi Engineering Service: Perkins Part Centre

SES Perkins Part Centre in Center of Kabul in Habib Katawzi Market Qwui-Markaz the biggest Part Center in Afghanistan any type of Perkins Parts, Filters & Electrical Equipment for any size of Power Generator, Industries machinery, & Construction Machinery available are all 100% Perkins Original under Perkins Warranty and Originality 100% Grantee.

Perkins® Dealer *Genuine Parts Protect your investment*

SERVICES ALL OVER AFGHANISTAN

▶**Looking for a cost effective, reliable, way to get your power needs?** Look no further than *Diesel Generators.* Consistently, *Diesel Generators* have proven to be extremely cost effective and efficient also **Safi Engineering Services** will provide any kind of Generators from 10KVA to 2500KVA on **Perkins UK engine & LOREY SAMER Power Unit** we are sealing by very best prices with delivery and installation with after sale Services.

OUR SERVICES

Generator sale -after Sale Service

SES able to supply Generators from 13.5 KVA to 2500 KVA for bigger Unite we are able to synchronize, Engine Original Perkins UK under Perkins warranty Power Unit Lor Deliver, install, commissioning, hand over any size of Generator Power Plane Project with Load Bank test according manufacturing company recommendation in any Part of Country.
After sale we do full services according contract between SES & client replace of Engine Oil, Oil Filters, Fuel Filters, Water filters, Fuel water separator filters, Full inspection of Gene set, with International & national Mechanical Engineer & Technician with 24 hours emergency full technical support services.

Rental Power

Safi engineering Services provides leading edge power solutions through its extensive fleet of power generators.
Our key service offerings include:

- Comprehensive fleet of diesel driven generators
- Sizes from 10kVA to 1250 KVA (larger units can be synchronized)
- Ingersoll Rand, Cummins, Perkins, Volvo.
- Ancillary equipment (fuel tanks, cables etc.) And Fuel Management Solution

What We Can Do For You

Safi engineering services offers the latest in mobile power through its comprehensive fleet of diesel powered generators.
Our generators include the following:

- Purpose built to withstand extreme conditions
- “Silenced” canopy and containerized unit
- Meet strict European environmental rules and regulations
- Fully bounded oversized internal fuel tanks (average 24 hrs run
- Efficient operating costs (best value in efficiency and reliability)
- We will deliver and install any size of Generators with ATI or A
- We have spar Generators when Rented Generators break down we will deliver it and reinstall it within 2 hours

Silent operation and reliable power combine to meet the requirements of applications ranging from 20 KVA to 2500 KVA emergency power through to entertainment industry, single or any size of building special events and concerts.

Genuine Perkins Parts

Safi Engineering Services is always proud to supply a complete range of high quality Perkins genuine parts which include, turbochargers, Liners, Pistons, Complete Overhauling Kit, as well as consumable parts like filters and fan belts, automatic voltage regulators in addition all parts needed for complete generator overhauling are available. SES providing the best affordable products and services in timely manner at the most competitive prices.

Auto Switches

ATS , ATI & Synchronizing systems, complete Electrical Equipment, changing manual to Auto systems, Commissioning and installing any size of Factory & building with PLC programming systems , Sale and installing by Qualified Electrical Engineer & TechnicianComplete Construction General Wiring by International standard safety code

Electrical:

Installation of high technology systems Electrical comprises of quality, safety, affordability and reliability are the key elements our expertise rotates around some of the major works delivering excellent in our products for Domestic, Commercial and Industrial In Addition to the electrical Engineering, Design and Construction works associated with the industry requirement, installation of Factories as international standard systems electrical distribution, Automatic and programmable systems of industrial by qualified Electrical and electronics Engineer.

1-Generator Panel – Auto control panel – Remote start control panel – AMF function control panel—Manual and auto start control panel PLC Programming Systems

2-Electrical – Automatic change-over switches – Electrical industrial controller – Electrical distribution board—Electronics programmable circuit – Electrical any size cable – circuit breaker any Amperes

Fuel Service

We are supplying best quality of Diesel with any Size of Tanker and installed water separators with free installation.
Installation and supply 200 liters Fuel Tank to 100.000 Liters with anti Rust and protection with isolated with any damages or leakage in future.

24/7 Services

Safi Engineering Services supply complete service support from delivery and commissioning of generators through to routine servicing and maintenance.
Our team of highly trained electrical and mechanical engineers provide unparalleled service support throughout your rental
SES also provides comprehensive service and maintenance throughout the rental through our dedicated in-house maintenance team. Routine maintenance includes changing filters and oil as well as a number of preventative maintenance procedures to ensure our units run to their optimum best.

Programming Systems

We are doing Programming any type Of Generators Control board ECM Like F.G Wilson From 2300 Series to 2800 Series Perkins Engine and power Wizard Control board Deep See Control board.

Emergency Power

Safi Engineering Services has a 24 hour response team. Equipment can be supplied at very short notice to assist with unscheduled power outages. Our teams are always there to help.

Transportation

Safi Engineering Services able to supply and delivery any size of Generators, Filters, Oil, Parts, Electrical equipment by own Transport with 24/ Hr services.

OPERATION SECTION WORKFLOW

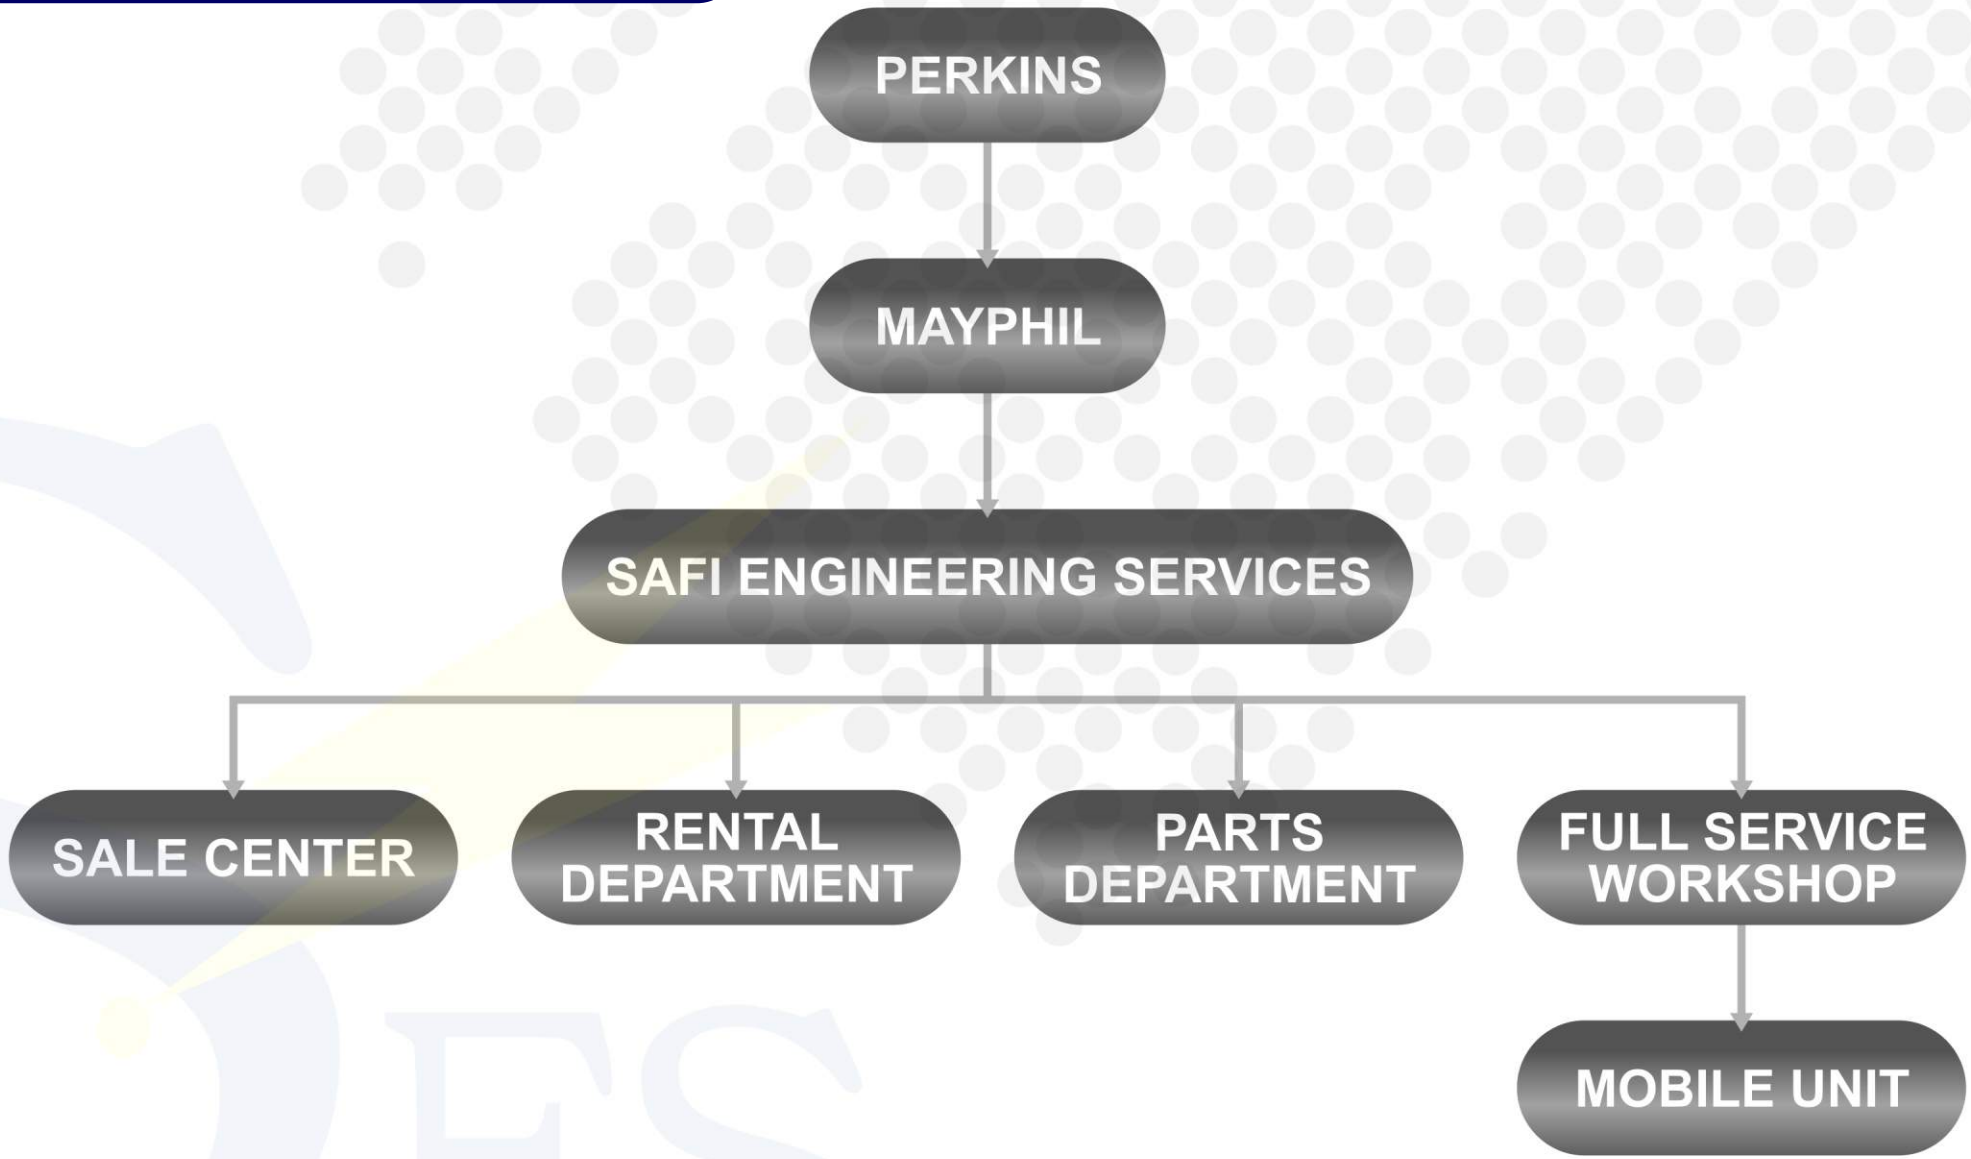

REFILL CAPACITIES

Regular Inspection of Generator / We Will Provide Regular Inspection of Generators
24-7 for Uninterrupted Power Supply for the UNAMA Compounds in 19 Locations all over Afghanistan.

We will provide permanent site personal 24/7 to provide uninterrupted electric power, full time staff will be Present for the regular inspection of generator at each location. The services/works under this item will include but not limited to the following:

1. **Top-up Fuel Tanks:**
- We will perform daily refueling
- We will keep records of fuel supplied and consumed daily.
- We will provide a data base system to report UNAMA representatives for daily fuel usage.

2. **Fuel Filter:**
- Our Site personal will check the fuel filter and remove any accumulated dirt every day.
- Our Site personal will check fuel supply line system for leaks every day.
- Our Site personal will remove any air bubble and check the quality of fuel along with it every day.
- Our site personal will regularly change fuel filter if required.

3. **Lubricating Oil and Condition:**
- Our Site Personal will lubricate & Check oil level and ensure that the level is within the recommended level on the dipstick and on the control panel.
- We will stop the running generators for at least 20 minutes before starting back we will check the oil level and make sure that it is within the recommended level.
- Our Site personal will ensure the oil levels in standby generators are within the recommended level before being started.
- Every day the viscosity and color of lubricating oil will be checked.
- We will lubricate all moving parts for better performance.
- We will change the lube oil if necessary.

4. **Oil Filter:**
- Every day the oil filter will be checked for dirt accumulation and will be cleaned if necessary.
- We will change oil filter if it is necessary for better performance of generators.

5. **Air Filter:**
- The air cartridge will b cleaned using an air blower with recommended pressure of 2-3bars (30psi) every day for better performance of generators.
- The panel primary and secondary air filters will be cleaned as well for better results.
- We will regularly change air filter of the generators if required.

6. **Water level in Radiator:**
• Every day the water level of the radiator will be checked and top up to the recommended level if necessary, water level will be full.
• We will ensure that the cap is closed tightly and check for leaks before starting the generator.

7. **Water Pump:**
• SES site personal will inspect for weep-holes for coolant leakage.
• We will add coolant if needed for keeping the generators functional.

8. **Exhaust System, Radiator and Hoses:**
• SES will inspect exhaust system, radiator and hoses.
• SES will Repair/ replace the radiators and hoses if necessary.

9. **Generator and Surroundings:**
• SES will clean generator surfaces, floor surfaces, panel and surroundings on daily bases.
• SES will check for oil and fuel spills especially on the floor will be cleaned with degreasers and appropriate chemical to keep the generators clean and 24-7 functional.

10. **Electrical Systems Inspection/Checking:**
• SES will check the generating voltage.
• SES will check Load-Current reading.
• SES will check the battery voltage and load check.
• SES will check for Alarm and warning messages and fix it accordingly as soon as we notice the warnings.
• SES will check for any electromechanical faults and will fix it on the spot.
• SES will report …… representative of inspection/checking done on the generators.
• SES will report Consumables and spare consumption to …….. representatives.
• SES will Report of modification done to …… representatives on site.
• SES will provide Marked check-list of daily maintenance activities performed on each 19 sites.
• SES will perform every day starting / shuttingof generators on each 19 sites.
• SES site personal will also perform Load shifting if necessary.
• SES Permanent site personal will check Control panels regularly for any faults.
• SES Site personal will also perform Synchronization.
• SES site personal will also provide and Check for Alternator.
• SES Site personal will check the electrical wires in case of any problem.
• SES site personal will check the AVR condition.
• SES Site personal will check the current transformer.
• SES Site personal will check the fuses and other accessories.

MAINTENANCE SECTION

- SES Site personal will perform testing of protection system.
- SES Site personal will perform Voltage adjusting.
- SES Site Personal will check the frequency and engine RPM regularly for better results.
- SES Site personal will check the PCM gauges, meters, connectors, EIM etc.
- SES Site Personal will check battery voltage to ensure voltage is at standard level.
- SES Site personal will ensure that the battery terminal is clean, dry and tight.
- SES Site personal will check and ensure that electrolyte is at recommended level.
- SES Site personal will replace battery/batteries if necessary.

11. **SES Generator maintenance log Book:**

- SES will maintain separate log book for each individual generator for better results of maintenance work.
- SES log book will contain record for the following:

o Fuel pressure
o Oil pressure
oWater temperature
o Fuel level in tanks before and after filling
o Fuel consumption record from fuel meter
o Generating voltage
o Load-Current reading
o Battery voltage
o Alarm and warning message
o Any electromechanical faults
o Report of testing/ checking done
o Consumables and spare consumption register/report
o Reports of modification done
o Marked check-list of daily maintenance activities performed
o Start/ shutting generators
o Load shifting
o Control panels
o Synchronization
o Alternator
o Electrical wires
o AVR condition
o Current transformer
o Fuses and other accessories
o Testing of protection system
o Voltage adjusting
o Frequency and engine RPM
o PCM gauges, meters, connectors, EIM etc.

SES will be submitting the daily log book to ……..officer in charge; any faults also will be recorded and reported to ……. officer in charge immediately on daily bases.

MAINTENANCE INTERVAL SCHEDULE

Schedule Preventive Maintenance

Safi Engineering Services will perform schedule preventive maintenance and repair of each generator set as per norms laid down in the generator manufacturer manual. Schedule preventive maintenance will be performed at every 250 till 8000 hours of generator. Similar to the daily maintenance, a log book for each generator will be kept. The services/works under this item are including the following:

250 Hours:

1. **Change Oil:**
- Drain oil completely and refill with appropriate new engine oil up to the recommended level
- SES will ensure that the drain plug and caps or dipsticks are in place and tightened
- SES will check for leakage.
- SES Site personal will collect the drained oil and handed over to ……. officer in charge for strange and subsequent disposal.

2. **Replace Oil Filter:**
- SES will remove oil filter and replace with a new filter of similar type
- SES site personal will ensure that the filter is tight and check for leakages.

3. **Change Fuel Filter:**
- SES site personal will change both primary and secondary fuel filters
- SES Site personal will close the fuel supply line's valve before changing the filters
- SES site personal will install new O-ring to fuel filter hosing and drain plugs regularly each day before refueling if required.
- SES site personal will check fuel tank for any sediment and water drain out
- SES will collect drained out fuel and hand it over to …… officer in charge
- SES will change external fuel filter as well on regular bases if required

4. **Cooling System:**
- SES site personal will regularly drain out coolant and replace (if it does not contain anti-freeze)
- SES site personal will change coolant's filter if required on regular bases
- SES site personal will check radiator and clean using steam and degreaser solvent chemical.
- SES site personal will inspect coolant pump for any leakage and repair it if necessary.

5. **Air Filter:**
• SES will perform air filter cleaning same as described in daily maintenance.

6. **Battery:**
• SES site personal will check the batteries on daily bases for better results and change it if required.

7. **Alternator:**
• SES will inspect alternator for loose connection and charging, tighten and repair if necessary.

8. **Belt Inspection and adjustment:**
• SES site personal will check Fan-dria11111ve and alternator belts and replace if not in good condition on regular bases.
• SES will check tension of belt and adjust as necessary.

9. **Injector Inspection and Adjustment:**
• SES site personal will inspect injector, valve clearance and adjust properly
• SES site personal will clean and calibrate pressure of injectors and replace if necessary.

10. **Sensors and Instrumentation:**
• SES site personal will clean engine's speed timing sensors, calibrate if necessary
• SES site personal will inspect engine valve-lash
• SES will calibrate engine instruments and conduct safety limit test.

11. **Hose and Clamps inspection:**
• SES will inspect hoses for leaks and replace it if necessary
• SES site personal will check for cracked and worn out hoses and will replace it for better performance.
• SES site personal will inspect clamps and tighten them if necessary.

12. **Start Motor Inspection:**
• SES will check starter motor for proper operation
• SES will check electrical connections for any wire cutouts and repair it if necessary
• SES will clean motor
• SES will check cable connection for loose contacts and overheating.

13.**Turbo Charger Inspection:**
- SES will perform regular checkups and clean turbo-charged compressor housing
- SES will perform regular checkups of bearing and replace if necessary
- SES will perform regular checkups for functional operation and abnormal noise
- SES will perform regular checkups of turbo filters, clean or replace them if necessary.

14.**Control Panel Inspection:**
- SES will perform regular checkups of electrical wires in the panel board.
- SES will perform regular checkups of fuses, breaker, relays and replace if necessary
- SES will perform regular checkups of connection and contacts for any loose connection or heating.
- SES will perform regular checkups for any cable leakage.

15.**Tighten Bolts and Nuts:**
- SES site personal will inspect all bolts and nuts including washers and tighten them if necessary
- SES will apply proper torque as per standard practice.

500 Hours:

SES permanent site personal will repeat all the services/works stated in the 250 hours maintenance schedule including the following:
- SES site personal will clean and test the generator after cooler core is cleaned.
- SES site personal will inspect engine air cleaner element and replace it if necessary.
- SES site personal will replace engine crankcase breather if necessary.
- SES site personal will inspect engine mounts, vibration damper and support on worn out and replace as necessary.
- SES site personal will replace fuel system's primary and secondary filter.

1000 Hours:

SES permanent site personal will repeat all the services/works stated in the 250 and 500 hours services maintenance schedule after 750 hours / 1000 hours for better performance of the generator and to provide uninterrupted power for…….. Compounds.

Top Overhaul

- SES mechanical engineers will remove the cylinder head of engine.
- SES mechanical engineers will remove all the parts mounted on the head and clean the head and all around the head.
- SES mechanical engineers will clean the surface of block cylinder and pistons.
- SES mechanical engineers will replace and calibrate inlet Valve exhaust valve, springs.
- SES mechanical engineers will replace piston ring and oil pump.
- SES mechanical engineers will replace Cam shaft bearing.
- SES mechanical engineers will close the cover of engine with new gasket.
- SES mechanical engineers will replace new injectors, belts, water pump left pump, V-belt and check the fuel pipes.
- SES mechanical engineers will replace new fuel injection pump if necessary.
- SES mechanical engineers will run the generator without load 24 hours and monitor the RPM, water oil leakage etc.
- SES mechanical engineers will test the generator by load test.
- SES mechanical engineers will put the generator under load normally and synchronize where needed.

Major Overhaul

- SES mechanical engineers will remove the cylinder head of engine.
- SES mechanical engineers will remove all the parts mounted on the head and clean the head.
- SES mechanical engineers will replace and Calibrate Inlet Valve, exhaust valve, springs.
- SES mechanical engineers will replace the old pistons and the liners.
- SES mechanical engineers will replace the old main bearing of crank shaft.
- SES mechanical engineers will replace liners, pistons and piston rings.
- SES mechanical engineers will replace oil pump.
- SES mechanical engineers will replace Cam shaft bearing.
- SES mechanical engineers will close the cover of engine with new gasket.
- SES mechanical engineers will replace injectors, belts, water pump, left pump, and check the fuel pipe.
- SES mechanical engineers will replace fuel injection pump if required.
- SES mechanical engineers will run the generator without load 48 hours and monitor the rpm, water oil, leakage etc.
- SES mechanical engineers will test the generator by load test.
- SES mechanical engineers will put the generator under load normally and synchronize where needed.

Other Task

Repairs:
SES mechanical engineers will have 4 / Mechanical team ready For any sudden break down or emergency repair not covered under scheduled maintenance rates, SES mechanical engineers will be provided along manpower for repairing.

Cleaning of fuel tanks and generator day tank:
SES site mechanical engineerswill drain monthly fuel tanks and generators day tanks for clearing any sludge of impurities settled down in the tanks. The deity fuel drained for this purpose will be recorded in the log book and will be given to UNAMA representatives.

New installations:
When necessary, SES will provide additional mechanical team on each site to perform installation and commissioning of new generators after removing the existing generator. SES will fix in position the generator and its associated parts, synchronize it, test and put back on load.

General

a. SES contract is for a period of one (1) year subject to performance and requirements with possibility of further extension. SES have visited and inspected all the sites where we intend to submit an offer, for the verification of the facilities.

b. SES is responsible for all chargers and taxes connected with the provision of services extended to ……. Including but not limited to usages, insurance, transportation, welfare, workman compensation, etc.

c. SES is responsible for the health and safety of our site staff under the service contract and we will provide all basic personnel protective equipment as per standard.

d. SES will provide all the required tools, equipment, safety equipment and machinery required to provide service. SES will provide evidence of the tools before commencing the contract.

e. SES will not enter into any collective bargaining agreement that conflicts with the terms and conditions of the contract.

REPLY TO QUESTIONS

What we are doing with 13.5 KVA to 2500 KVA Generators?

Cylinder Head Replacing: tasking may include but is not limited to the following perform all of the operations, repairs, and testing per the par the manufacturer's recommendation.

Mechanical:

A. Cylinder heads (1x replace) , cleaning, disassembly, inspection, testing and as-required refurbishment or replacement.

- ✓Rocker arms
- ✓Rocker arm shafts
- ✓Inlet and exhaust valves
- ✓Valve bridges (if applicable)
- ✓Valve bridges locating studs

✓Valve Springs
✓Valve Springs caps, rotators, keepers
✓Valve seats
✓Fuel gallery leak test
✓Cylinder head inspection, hydrostatic test and NDT (dye penetrate or magnetic particle inspection)

B. 1 x Piston, connecting road, cylinder liner – cleaning, disassembly, inspection, as – required refurbishment or Replacement.

1. **Crankshaft main bearing** – cleaning, inspection and as – required refurbishment or replacement, including:

✓Journal/fillet condition
✓Thrust face condition
✓Measurement of journals
✓Wear sleeves
✓Main bearing caps and bolts
✓Vibration damper
✓Drive gear(s)
✓Flywheel, including ring- gear

2. **Cylinder block** – cleaning, inspection and as- required refurbishment, Inspection

Replacement & camshaft bushings

✓Replacement of seals
✓Hydrostatic testing
✓Inspection/replacement of locating pins and studs
✓Cleaning of all oil/fuel galleries
✓Cleaning /inspection of piston cooling oil nozzles
✓Inspection of all studs and tapping
✓Inspection of coolant galleries (corrosion/deposits)

AFTER JOB COMPLETION▶

VI

What we are doing for inspection of Generators?

End of Work Inspection of Generators

1. Drive Belts.
2. Governor type and features
3. Engine timing mark
4. Coolant type and concentration
5. Radiator Pipe, hose, Valve, Cap,
6. Block coolant drains
7. Coolant level
8. Coolant line connection
9. Combustion Air Filter
10. Intake air silencer
11. Lube- oil sump drain
12. Lube- Oil filter
13. Oil Level indicator
14. Oil fills level
15. Oil line connector
16. Oil cooler
17. Fuel type
18. Fuel line connection
19. Fuel filter
20. Injector & fuel pump all connection
21. Starting motor
22. Starting aids
23. Battery connectors
24. Starter relay, protection relay
25. All DC wiring Connection
26. Instrumentation
27. Hazard to personnel
28. AC connection
29. Switch board
30. Control panel
31. Main circuit breaker
32. Full Grounding System
33. Enclosure weather resistant
34. Engine & Generator mounting Bolts
35. Starting Engine
36. Hz & RPM
37. Voltage
38. DC Alternator
39. silencer Smoking
40. Exhaust – Heat System
41. Oil Line connection for any leakage
42. Fuel full system & connection for any Leakage
43. Coolant Full system for any Leakage
44. During load
45. HZ & Rpm
46. Voltage
47. Amperes
48. Silencer Smoking
49. Fuel consumption

When we finish we will hand over for to Customer 100 % satisfaction.

VI

What we are doing for inspection of Generators?

Inspection of Generators for non-Electrical Engine / Electrical Engine: 13.5 KVA to 2500 KVA

1. Drive Belts.
2. Governor type and features
3. Engine timing mark
4. Coolant type and concentration
5. Radiator Pipe, hose, Valve, Cap,
6. Block coolant drains
7. Coolant level
8. Coolant line connection
9. Combustion Air Filter
10. Intake air silencer
11. Lube- oil sump drain
12. Lube- Oil filter
13. Oil Level indicator
14. Oil fills level
15. Oil line connector
16. Oil cooler
17. Fuel type
18. Fuel line connection
19. Fuel filter
20. Injector & fuel pump all connection
21. Starting motor
22. Starting aids
23. Battery connectors
24. Starter relay, protection relay
25. All DC wiring Connection
26. Instrumentation
27. Hazard to personnel
28. AC connection
29. Switch board
30. Control panel
31. Main circuit breaker
32. Full Grounding System
33. Enclosure weather resistant
34. Engine & Generator mounting Bolts
35. Computerizing of Electrical Engine in off position 1306 & Over
36. Starting Engine
37. Hz & RPM
38. Voltage
39. DC Alternator
40. silencer Smoking
41. Exhaust – Heat System
42. Oil Line connection for any leakage
43. Fuel full system & connection for any Leakage
44. Coolant Full system for any Leakage
45. During load
46. HZ & Rpm
47. Voltage
48. Amperes
49. Silencer Smoking
50. Fuel consumption
51. Computerizing 1306 Series Engine & Over
52. Writing full report to the client

What we are doing with Service of Generator?

Service & After Services Check Up of Generators from: 13.5 KVA to 2500 KVA

Section One: Service

50. Check & Starting Gene set to worm up in certain temperature degree
51. Turning Off Gene set
52. Opening Crankcase Valve
53. Removing all Old Engine Oil
54. Removing Oil Filter Replacing by new unite
55. Re filling Engine Oil in right love according manufacturing level indicator on Oil Gauge
56. Removing fuel Filter replacing by new filter
57. Refilling the fuel on Filters & all Fuel System
58. Removing water Filter & replacing by new filter
59. Removing Air Filter & Replacing by new filter
60. Check Engine Coolant Proper levels and Condition
61. Recheck Engine Oil Gauge to make sure be on Proper level
62. Full cleaning Gene set Engine Oil Leakage Fuel Leakage

Section Two: After Service Engine Inspection

63. Drive Belts.
64. Engine timing mark
65. Coolant type and concentration
66. Oil Filters & Line connection for any leakage
67. Fuel Filter & full Fuel system connection for any Leakage
68. Radiator Pipe, hose, Valve, Cap,
69. Coolant level
70. Coolant line connection
71. Combustion Air Filter
72. Lube- oil sump drain
73. Oil Level indicator
74. Oil line connector
75. Oil cooler
76. Fuel type

Section Three: After Service Ac & Dc Power System Inspection

77. Starting motor
78. Starting aids
79. Battery connectors
80. Battery Aside
81. Starter relay, protection relay
82. All DC wiring Connection
83. AC connection with Circuit Becker

Section Four: After Service Starting Gene Set Inspection

1. Oil Filters & Line connection for any leakage engine is On Position
2. Fuel Filter & full Fuel system connection for any Leakage
3. Radiator Pipe, hose, Valve, Cap,
4. Coolant line connection for any leakage
5. Silencer Smoking
6. Engine & Generator mounting Bolts

Section Five: After Service Gene Set on Position Power System Inspection

7. Control panel Display Oil level, Water Temperature, Voltage, Hz, Rpm,
8. Main circuit breaker
9. All DC Loom or Wiring
10. Under Load
11. Hz & Rpm
12. Voltage each Phase
13. DC Alternator
14. Voltage
15. Amperes

What we are doing with Major Overhauling?

Cylinder Head Overhauling: tasking may include but is not limited to the following perform all of the operations, repairs, and testing per the par the manufacturer's recommendation.

Mechanical:

C. Cylinder heads (each)- removal, cleaning, disassembly, inspection, testing and as-required refurbishment or replacement.

- ✓Rocker arms
- ✓Rocker arm shafts
- ✓Inlet and exhaust valves
- ✓Valve bridges (if applicable)
- ✓Valve bridges locating studs
- ✓Valve guides
- ✓Valve Springs
- ✓Valve Springs caps, rotators, keepers
- ✓Valve seats
- ✓Fuel gallery leak test
- ✓Cylinder head inspection, hydrostatic test and NDT (dye penetrate or magnetic particle inspection)

D. Pistons, connecting roads, cylinder liner – cleaning, disassembly, inspection, testing and as – required refurbishment or replacement.

1. **Crankshaft main bearing** – cleaning, inspection and as – required refurbishment or replacement, including:

- ✓Journal/fillet condition
- ✓Thrust face condition
- ✓Measurement of journals
- ✓Wear sleeves
- ✓Main bearing caps and bolts
- ✓Vibration damper
- ✓Drive gear(s)
- ✓Flywheel, including ring- gear
- ✓Drive plates for alternator

Telephone Nos: 0093(0)780 006 7000 - 777 258 366 - 799 258 366 - 792 006 700

3. **Cylinder block** - cleaning, inspection and as- required refurbishment, Inspection of mating/sealing surfaces for trueness, cracks, corrosion or fretting wear

✓Replacement of camshaft bushings
✓Replacement of seals
✓Hydrostatic testing
✓Inspection/replacement of locating pins and studs
✓Cleaning of all oil/fuel galleries
✓Cleaning /inspection of piston cooling oil nozzles
✓Inspection of all studs and tapping
✓Inspection of coolant galleries (corrosion/deposits)

4. **Gear Train (s)** - inspection, and as – required refurbishment, or replacement of gears including associated bearing and bushings. Gear on driven components will be include.

4.1 **Camshaft /Valve Train** - inspection and as required refurbishment or replacement, including of bearing journals, drive gear and lobes for Wear/damage.

✓Cam journals and lobes
✓Bushings and shafts
✓Levers/Rollers/Pins
✓Push rods

5. **Cooling system** - we will cleaning, testing, inspection, and as required refurbishment or replacement of cooling system components, including: Radiator or water pump(jacket and After cooler, if appropriate)

✓Water pump drive adapter if used
✓Oil cooler
✓After cooler cores
✓After cooler heat exchanger
✓Temperature regulators/ thermostats
✓Valves

6. **Water treatment accoutrements** - inspection/refurbishment of fan drive components including.

✓Bearing o Shafto Grease Fittings
✓Sheave
✓Fan hubs and blades

VI

✓Tensioners
✓Idlers
✓Fan shrouds and guards
✓Cleaning of all Air ducting
✓Replacement of all Gasket, seals, belts, and Hoses

7. **Lubrication system:**

Cleaning inspection and as required refurbishment or replacement of system components.
✓Pump/ pressure relief valve
✓Filter heads
✓Piping
✓Piston cooling nozzles
✓Replacement of all Gasket, seals and hoses

8. **Fuel System:**

Cleaning, inspection and as – required refurbishment or replacement of system components
✓Supply (lift) pump
✓Filter heads
✓Piping
✓Fuel/water separator
✓Cooler/Injection Pump
✓Injectors
✓Relief Valves
✓Pressure/volume control orifices
✓Manifolds/valves
✓Installed fuel tank, if in use
✓Replacement of all gaskets seals, fuel injectors and house

9. **Combustion Air System**

Cleaning and inspection as required refurbishment of Air system components including
✓Air Cleaner
✓Turbocharger
✓Air Ducting
✓Replacement of all gasket seal and hoses
✓Testing/replacement of air filter restriction indicator

10. **Exhaust System** – inspection and as required refurbishment or replacement system components including

✓Exhaust manifold O gasket and sealing ring
✓Exhaust Piping and silencers
✓Flexible joints O insulation/heat shields
✓Support brackets
✓Rain caps and collars if installed
✓Replacement of all gasket and seals
✓Corrosion control and repainting

Note: no asbestos will be used in refurbishment actions

Electrical System

Major component Items such as the (Alternator, Motor Starter, Engine Control, ECM, Relay, DC wiring, all sensors, etc) shall be inspected to ensure all Generator system are addressed appropriately.

1. **Electrical:**

✓Starting system
✓New batteries will be installed if needed
✓Cleaning inspection as required refurbishment or replacement components.
✓Battery cable o battery support/securing devices
✓Auxiliary battery charger if equipped
✓Battery charger alternator
✓Starter motor or starter solenoid switches

2. **Engine Controller/ sensor:**

Cleaning inspection as required refurbishment or replacement components

✓Switch relays and timers
✓Speed pressure and temperature sensor
✓Panel display/gauges
✓Flexible panel membranes
✓PCBs o shut down solenoid
✓Electrical governor

3. **Mean circuit breaker:**

Cleaning inspection as required refurbishment or replacement components breaker assembly – bus bar/ connection lugs- cabling – Solenoid- charger Motor

4. **Alternator and associated controls/ sensors:**

Cleaning inspection as required refurbishment or replacement of system components

✓Excitation components (PMG or bridge rectifier)
✓Windings/ insulation Bus bars/leads
✓Terminations
✓A.V.R
✓CTs and PTs
✓Synchronizing/load sharing board/components
✓Other PCBs

5. **Wiring harnesses:**

Cleaning inspection as required refurbishment or replacement of system components

✓Wire condition
✓Bundling materials
✓Terminations

6. **Miscellaneous motors/other electrical components:**

Cleaning inspection as required refurbishment or replacement of system components

✓Fan or pump motors
✓Solenoid valves
✓Contactors/relay
✓Switches
✓Replacement of all missing covers locating brackets, conduit, cable tray sections clamps or other cabling/conduit securing devices

Important Safety Information

Most accidents that involve product operation, maintenance and repair are caused by failure to observe basic safety rules or precautions. An accident can often be avoided by recognizing potentially hazardous situations before an accident occurs. A person must be alert to potential hazards. This person should also have the necessary training, skills and tools to perform these functions properly.

Improper operation, lubrication, maintenance or repair of this product can be dangerous and could result in injury or death.

Do not operate or perform any lubrication, maintenance or repair on this product, until you have read and understood the operation, lubrication, maintenance and repair information.

Safety precautions and warnings are provided in this manual and on the product. If these hazard warnings are not needed, bodily injury or death could occur to you or to other persons.

The hazards are identified by the “Safety Alert Symbol” and followed by a “Signal Word” such as “DANGER”, “WARNING” or “CAUTION”. The Safety Alert “WARNING” label is shown below.

⚠ WARNING

The meaning of this safety alert symbol is as follows:
Attention! Become Alert! Your Safety is Involved.
The message that appears under the warning explains the hazard and can be either written or pictorially presented.
Operations that may cause product damage are identified by “NOTICE” labels on the product and in this publication.

Perkins cannot anticipate every possible circumstance that might involve a potential hazard. The warnings in this publication and on the product are, therefore, not all inclusive. If a tool, procedure, work method or operating technique that is not specifically recommended by Perkins is used, you must satisfy yourself that it is safe for you and for others. You should also ensure that the product will not be damaged or be made unsafe by the operation, lubrication, maintenance or repair procedures that you choose.

The information, specifications, and illustrations in this publication are on the basis of information that was available at the time that the publication was written. The specifications, torques, pressures, measurements, adjustments, illustrations and other items can change at any time. These changes can affect the service that is given to the product. Obtain the complete and most current information before you start any job. Perkins dealers or Perkins distributors have the most current information available.

⚠ WARNING

When replacement parts are required for this product Perkins recommends using Perkins replacement parts.
Failure to heed this warning can load to premature failures, product damage, personal injury or death.

SAFETY SECTION

SAFETY MESSAGES

There may be several specific warning signs on an engine. The exact location of the hazards and the description of the hazards are reviewed in this section. Please become familiar with all warning signs.
Ensure that all of the warning signs are legible. Clean the warning signs or replace the warning signs if the words cannot be read or if the pictures are not visible. When the warning signs are cleaned, use a cloth, water, and soap. Do not use solvent, gasoline, or other harsh chemicals to clean the warning signs.
Solvents, gasoline, or harsh chemicals could loosen the adhesive that secures the warning signs. The warning signs that are loosened could drop off of the engine.
Replace any damaged warning signs or missing warning signs. If a warning sign is attached to a part of the engine that is replaced, install a new warning sign on the replacement part. Perkins dealers or Perkins distributors can provide new warning signs.

Universal Warning

⚠ WARNING

Do not operate or work on this equipment unless you have read and understand the instructions and warnings in the Operation and Maintenance Manuals. Failure to follow the instructions or heed the warnings could result in serious injury or death

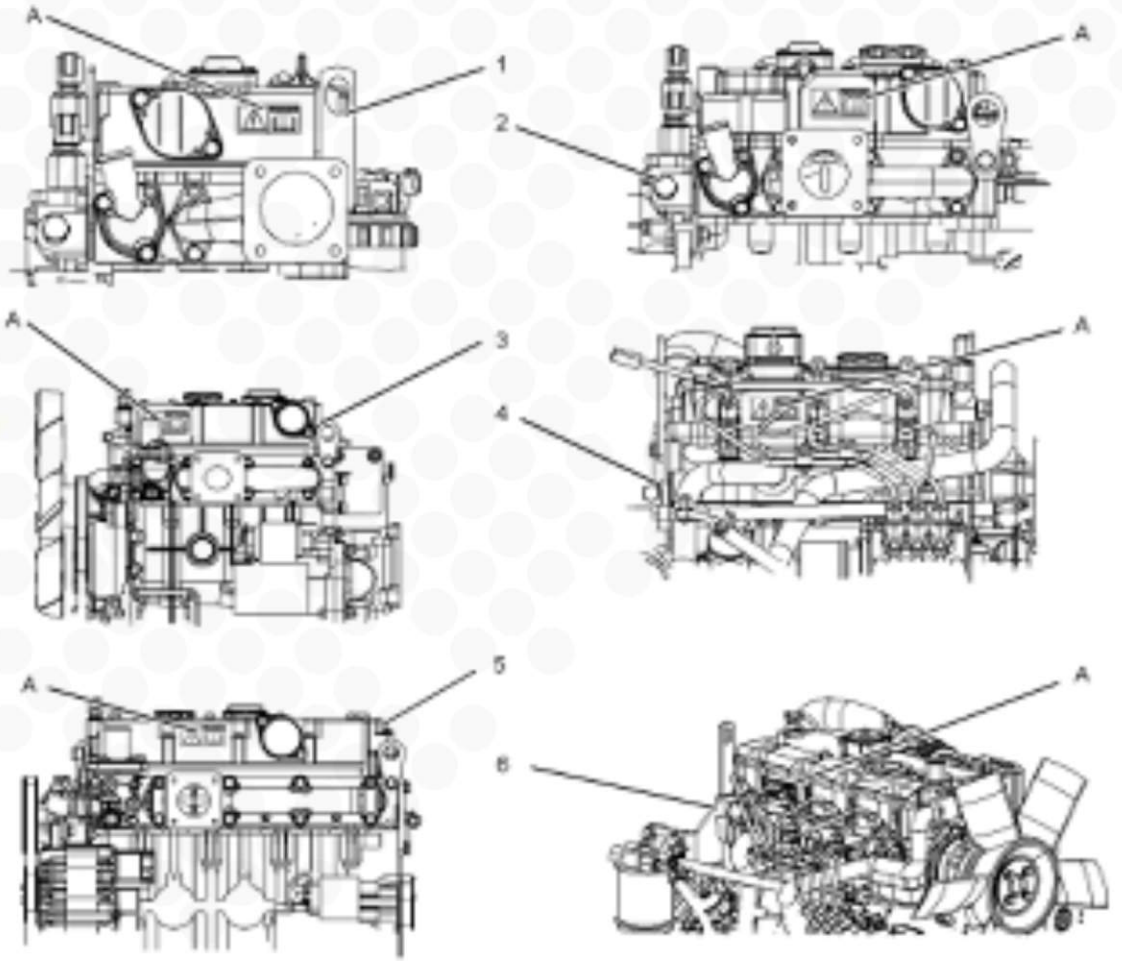

Illustration 2 g01324128

(A) Location of warning label
(1) 402D-05
(2) 403D-07
(3) 403D-11
(4) 403D-15, 403D-15T and 403D-17
(5) 404D-15
(6) 404D-22, 404D-22T and 404D-22TA

GENERAL HAZARD INFORMATION

Illustration 3 **g00104545**

- Attach a “Do Not Operate” warning tag or a similar warning tag to the start switch or to the controls before you service the equipment or before you repair the equipment.

Illustration 4 **g00702020**

- Wear a hard hat, protective glasses, and other protective equipment, as required.
- Do not wear loose clothing or jewelry that can snag on controls or on other parts of the engine.
- Make sure that all protective guards and all covers are secured in place on the engine.
- Keep the engine free from foreign material. Remove debris, oil, tools, and other items from the deck, from walkways and from the steps.
- Never put maintenance fluids into glass containers. Drain all liquids into a suitable container.
- Obey all local regulations for disposal of liquids.
- Use all cleaning solutions with care.

- Report all necessary repairs.
- Do not allow unauthorized personnel on the equipment.
- Ensure that the power supply is disconnected before you work on the bus bar or the glow plugs.
- Perform maintenance on the engine with the equipment in the servicing position. Refer to the OEM information for the procedure for placing the equipment in the servicing position.

PRESSURE AIR AND WATER

Pressurized air and/or water can cause debris and/or hot water to be blown out. This could result in personal injury.
The direct application of pressurized air or pressurized water to the body could result in personal Injury.
When pressurized air and/or water is used for Cleaning, wear protective clothing, protective shoes, and eye protection. Eye protection includes goggles or a protective face shield.
The maximum air pressure for cleaning purposes must be below 205 KPA (30 psi).
The maximum water pressure for cleaning purposes must be below 275 KPA (40psi).

FLUID PENETRATION

Pressure can be trapped in the hydraulic circuit long after the engine has been stopped. The pressure can cause hydraulic fluid or items such as pipe plugs to escape rapidly if the pressure is not relieved correctly. Do not remove any hydraulic components or parts until pressure has been relieved or personal injury may occur. Do not disassemble any hydraulic components or parts until pressure has been relieved or personal injury may occur. Refer to the OEM information for any procedures that are required to relieve the hydraulic pressure.

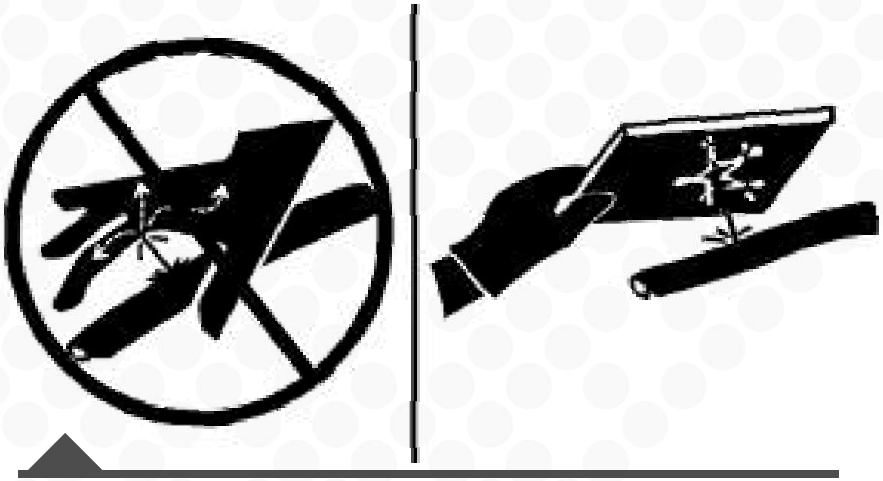

Always use a board or cardboard when you check for a leak. Leaking fluid that is under pressure can penetrate body tissue. Fluid penetration can cause serious injury and possible death. A pin whole leak can cause severe injury. If fluid is injected into your skin, you must get treatment immediately. Seek treatment from a doctor that is familiar with this type of injury.

CONTAINING FLUID SPILLAGE

Care must be taken in order to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting and repair of the engine. Make provision to collect the fluid with a suitable container before any compartment is opened or before any component is disassembled.

- Only use the tools that are suitable for collecting fluids and equipment that is suitable for collecting fluids.
- Only use the tools that are suitable for containing fluids and equipment that is suitable for containing fluids.
- Obey all local regulations for the disposal of liquids.

BURN PREVENTION

Do not touch any part of an operating engine. Allow the engine to cool before any maintenance is performed on the engine. Relieve all pressure in the air system, in the hydraulic system, in the lubrication system, in the fuel system, or in the cooling system before any lines, fittings or related items are disconnected.

COOLANT

When the engine is at operating temperature, the engine coolant is hot. The coolant is also under pressure. The radiator and all lines to the heaters or to the engine contain hot coolant. Any contact with hot coolant or with steam can cause severe burns. Allow cooling system components to cool before the cooling system is drained. Check the coolant level after the engine has stopped and the engine has been allowed to cool. Ensure that the filler cap is cool before removing the filler cap. The filler cap must be cool enough to touch with barehanded. Remove the filler cap slowly in order to relieve pressure. Cooling system conditioner contains alkali. Alkali can cause personal injury. Do not allow alkali to contact the skin, the eyes, or the mouth.

OILS

Hot oil and hot lubricating components can cause personal injury. Do not allow hot oil to contact the skin. Also, do not allow hot components to contact the skin.

BATTERIES

Electrolyte is an acid. Electrolyte can cause personal injury. Do not allow electrolyte to contact the skin or the eyes. Always wear protective glasses for servicing batteries. Wash hands after touching the batteries and connectors. Use of gloves is recommended.

FIRE PREVENTION AND EXPLOSION PREVENTION

All fuels, most lubricants, and some coolant mixtures are flammable. Flammable fluids that are leaking or spilled onto hot surfaces or onto electrical components can cause a fire. Fire may cause personal injury and property damage.

A flash fire may result if the covers for the engine crankcase are removed within fifteen minutes after an emergency shutdown. Determine whether the engine will be operated in an environment that allows combustible gases to be drawn into the air inlet system. These gases could cause the engine to over speed. Personal injury, property damage, or engine damage could result. If the application involves the presence of combustible gases, consult your Perkins dealer and/or your Perkins distributor for additional information about suitable protection devices.

Remove all flammable combustible materials or conductive materials such as fuel, oil, and debris from the engine. Do not allow any flammable combustible materials or conductive materials to accumulate on the engine.

Store fuels and lubricants in correctly marked containers away from unauthorized persons. Store oily rags and any flammable materials in protective containers. Do not smoke in areas that are used for storing flammable materials. Do not expose the engine to any flame. Exhaust shields (if equipped) protect hot exhaust components from oil or fuel spray in case of a line, a tube, or a seal failure. Exhaust shields must be installed correctly. Do not weld on lines or tanks that contain flammable fluids. Do not flame cut lines or tanks that contain flammable fluid. Clean any such lines or tank thoroughly with a nonflammable solvent prior to welding or flame cutting. Wiring must be kept in good condition. All electrical wires must be correctly routed and securely attached.

Check all electrical wires daily. Repair any wires that are loose or frayed before you operate the engine. Clean all electrical connections and tighten all electrical connections. Eliminate all wiring that is unattached or unnecessary. Do not use any wires or cables that are smaller than the recommended gauge. Do not bypass any fuses and/or circuit breakers.
Arcing or sparking could cause a fire. Secure connections, recommended wiring, and correctly maintained battery cables will help to prevent arcing or sparking. Inspect all lines and hoses for wear or for deterioration. The hoses must be correctly routed. The lines and hoses must have adequate support and secure clamps. Tighten all connections to the recommended torque.
Leaks can cause fires. Oil filters and fuel filters must be correctly installed. The filter housings must be tightened to the correct
torque.
Use caution when you are refueling an engine. Do not smoke while you are refueling an engine. Do not refuel an engine near open flames or sparks. Always stop the engine before refueling.

FIRE PREVENTION AND EXPLOSION PREVENTION

Gases from a battery can explode. Keep any open flames or sparks away from the top of a battery. Do not smoke in battery charging areas. Never check the battery charge by placing a metal object across the terminal posts. Use a voltmeter or hydrometer.
Incorrect jumper cable connections can cause an explosion that can result in injury. Refer to the Operation Section of this manual for specific instructions. Do not charge a frozen battery. This may cause an explosion. The batteries must be kept clean. The covers (if equipped) must be kept on the cells. Use the recommended cables, connections, and battery box covers when the engine is operated.

FIRE EXTINGUISHER

Make sure that a fire extinguisher is available. Be familiar with the operation of the fire extinguisher.Inspect the fire extinguisher and service the fire extinguisher regularly. Obey the recommendations on the instruction plate.

LINES, TUBES AND HOSES

Do not bend high pressure lines. Do not strike high pressure lines. Do not install any lines that are bent or damaged. Do not clip any other items to the high pressure lines.
Repair any lines that are loose or damaged. Leaks can cause fires. Consult your Perkins dealer or your Perkins distributor for repair or for replacement parts. Check lines, tubes and hoses carefully. Do not use your bare hand to check for leaks. Use a board or cardboard to check for leaks. Tighten all connections to the recommended torque. Replace the parts if any of the following conditions are present:

- End fittings are damaged or leaking.
- Outer coverings are chafed or cut.
- Wires are exposed.
- Outer coverings are ballooning.
- Flexible parts of the hoses are kinked.
- Outer covers have embedded armoring.
- End fittings are displaced.

Make sure that all clamps, guards, and heat shields are installed correctly. During engine operation, this will help to prevent vibration, rubbing against other parts, and excessive heat.

CRUSHING PREVENTION AND CUTTING PREVENTION

Support the component correctly when work beneath the component is performed. Unless other maintenance instructions are provided, never attempt adjustments while the engine is running.
Stay clear of all rotating parts and of all moving parts. Leave the guards in place until maintenance is performed.
After the maintenance is performed, reinstall the guards.

Keep objects away from moving fan blades. The fan blades will throw objects or cut objects.
When objects are struck, wear protective glasses in order to avoid injury to the eyes. Chip or other debris may fly off objects when objects are struck. Before objects are struck, ensure that noone will be injured by flying debris.

MOUNTING AND DISMOUNTING

Inspect the steps, the handholds, and the work area before mounting the engine. Keep these items clean and keep these items in good repair.
Mount the engine and dismount the engine only at locations that have steps and/or handholds. Do not climb on the engine, and do not jump off the engine.
Face the engine in order to mount the engine or dismount the engine. Maintain a three-point contact with the steps and handholds. Use two feet and one hand or use one foot and two hands. Do not use any controls as handholds. Do not stand on components which cannot support your weight. Use an adequate ladder or use a work platform. Secure the climbing equipment so that the equipment will not move. Do not carry tools or supplies when you mount the
engine or when you dismount the engine. Use a hand line to raise and lower tools or supplies.

BEFORE STARTING ENGINE

Before the initial start-up of an engine that is new, serviced or repaired, make provision to shut the engine off, in order to stop an over speed. This may be accomplished by shutting off the air and/or fuel supply to the engine.
Over speed shutdown should occur automatically for engines that are controlled electronically. If automatic shutdown does not occur, press the emergency stop button in order to cut the fuel and/or air to the engine.
Inspect the engine for potential hazards.
Before starting the engine, ensure that no one is on, underneath, or close to the engine. Ensure that the area is free of personnel.
If equipped, ensure that the lighting system for the engine is suitable for the conditions. Ensure that all lights work correctly, if equipped.
All protective guards and all protective covers must be installed if the engine must be started in order to perform service procedures. To help prevent an accident that is caused by parts in rotation, work around the parts carefully.
Do not bypass the automatic shutoff circuits. Do not disable the automatic shutoff circuits. The circuits are provided in order to help prevent personal injury. The circuits are also provided in order to help prevent engine damage.
See the Service Manual for repairs and for adjustments.

ENGINE STARTING

⚠ WARNING

Do not use aerosol types of starting aids such as ether. Such use could result in an explosion and personal injury .

If a warning tag is attached to the engine start switch or to the controls, DO NOT start the engine or move the controls. Consult with the person that attached the warning tag before the engine is started.
All protective guards and all protective covers must be installed if the engine must be started in order to perform service procedures. To help prevent an accident that is caused by parts in rotation, work around the parts carefully.
Start the engine from the operator's compartment or from the engine start switch.
Always start the engine according to the procedurethat is described in the Operation and Maintenance Manual, "Engine Starting" topic in the Operation Section. Knowing the correct procedure will help to prevent major damage to the engine components.
Knowing the procedure will also help to prevent personal injury.
To ensure that the jacket water heater (if equipped) and/or the lube oil heater (if equipped) is working correctly, check the water temperature gauge and the oil temperature gauge during the heater operation.
Engine exhaust contains products of combustion which can be harmful to your health. Always start the engine and operate the engine in a well ventilated area. If the engine is started in an enclosed area, vent the engine exhaust to the outside.

Note:
The engine is equipped with an automatic device for cold starting for normal conditions of operation. If the engine will be operated in very cold conditions, the nan extra cold starting aid may be required.
Normally, the engine will be equipped with the correct type of starting aid for your region of operation.
The engines are equipped with a glow plug starting Aid in each individual cylinder that heats the intake air in order to improve starting.

ENGINE STOPPING

Stop the engine according to the procedure in the Operation and Maintenance Manual, "Engine Stopping (Operation Section)" in order to avoid overheating of the engine and accelerated wear of the engine components.
Use the Emergency Stop Button (if equipped) ONLY in an emergency situation. Do not use the Emergency.
Stop Button for normal engine stopping. After an emergency stop, DO NOT start the engine until the problem that caused the emergency stop has been corrected.
Stop the engine if an over speed condition occurs during the initial start-up of a new engine or an engine that has been overhauled. This may be accomplished by shutting off the fuel supply to the engine and/or shutting off the air supply to the engine.

ELECTRICAL SYSTEM

Never disconnect any charging unit circuit or battery circuit cable from the battery when the charging unit is operating. A spark can cause the combustible gases that are produced by some batteries to ignite.
To help prevent sparks from igniting combustible gases that are produced by some batteries, the negative "-" jump start cable should be connected last from the external power source to the negative terminal of the starting motor. If the starting motor is not equipped with a negative "-" terminal, connect the jump start cable to the engine block.
Check the electrical wires daily for wires that are loose or frayed. Tighten all loose electrical wires before the engine is started. Repair all frayed electrical wires before the engine is started. See the Operation and Maintenance Manual for specific starting instructions.

GROUND PRACTICES

Correct grounding for the engine electrical system is necessary for optimum engine performance and reliability. Incorrect grounding will result in uncontrolled electrical circuit paths and in unreliable electrical circuit paths.
Uncontrolled electrical circuit paths can result in damage to main bearings, to crankshaft bearing journal surfaces, and to aluminum components.
Engines that are installed without engine-to-frame ground straps can be damaged by electrical discharge. To ensure that the engine and the engine electrical systems function correctly, an engine-to-frame ground strap with a direct path to the battery must be used. This path may be provided by way of a direct engine ground to the frame. All grounds should be tight and free of corrosion.
The engine alternator must be grounded to the negative battery terminal with a wire that is adequate to handle the full charging current of the alternator.

WARRANTY INFORMATION

PERKINS WARRANTY

Policy 1
- All aftermarket issues are the responsibility of the Perkins distributor network.

Policy 2
- OEM network can conduct warranty but all spares must be purchased through the local Perkins distributor.

Policy 3
- All aftermarket issues are the responsibility of the OEM and do not rely on the Perkins distributor.
- If any warranty work is carried out by the distributor then they invoice the OEM who then claims the money back from Perkins via PWS.

PRODUCT GROUP WARRANTY

Product Group 1 - Constant or Variable
- EP – Prime use/Constant speed only.
- All series.
- Variable speed – 1100A
- 12 months from delivery to end user.
- 24 months for major components without hours limit.
- Low usage – less than 500 hours, extends to 2 years or 1000 hours which ever occurs first.

Product Group 2 - Constant or Variable
- EP/Constant speed – Standby only.
- 400, 1100 and 1200 Series.
- Variable speed.
- 400, 800, 854, 1100 and 1200 Series.
- 24 Months or for a specific number of hours.
- 400 Series = 2000 hours.
- 800, 854, 1100 and 1200 = 3000 hours.

- If these hours are exceed within the first 12 months the warranty expires at the 12 month point.
- 36 months for major components without hours limit.
- Low usage – less than 500 hours per annum extends to 3 years or 1500 hours which ever occurs first.

PROPRIETARY EQUIPMENT WARRANTY

- Warranty covers all proprietary equipment sourced and fitted by Perkins prior to dispatched other than the FIP.
- FIP is serviced and warranted through the FIP suppliers own service organization.
- Applicable to all FIPs less the following:

Bosch VP 30 as fitted to 1100 series electronic engines.
- If diagnostics suggest the FIP is suspect it is to be replaced with a new pump.
- Old pump to be drained sealed and returned to Perkins with Warranty Claim and EST Report.

CAT CR200 as fitted to 1100 series electronic engines.
- If diagnostics suggest the FIP is suspect it is to be replaced with a new pump.
- Old pump to be drained sealed and returned to Perkins with Warranty Claim and EST Report.

Zexel FIP as fitted to 400 series engines.
- The Zexel pump is not serviceable and if diagnostics suggest it is suspect it is to be replaced with a new pump.
- Old pump is to be held at the distributor as per normal warranty parts retention process.

The common rail pump fitted to the **854** and **1200 series** is not serviceable.
- If diagnostics suggest the FIP is suspect it is to be replaced with a new pump.
- Old pump to be drained sealed and returned to Perkins with Warranty Claim and EST Report.

mayphil

Perkins® Dealer

OPERATIONAL RULES

- Warranty works takes absolute priority.
- Investigation on site within 24 hours.
- If after investigation it is not considered warrantable a Warranty Rejection Report to be issued.
- If not warrantable the customer is to pay for the investigation.
- Claims to be submitted within 45 days.
- All claims to be submitted using Perkins Warranty System (PWS).
- Labour rates as set by Perkins.
- Travel rates and mileage as agreed, travel up to a maximum of 300 miles.
- Justification required for more than one journey to site.

SHELF LIFE WARRANTY

- Perkins discourage storage for more than 12 months.
- Reserve the right to refuse claims arising from storage (over 12 months)related issues.
- FIP, seals, hoses, belts, water pumps, radiators and electrical items.
- For engine dispatched before 01 Sep 2006.
- Shelf life of 36 months. This should now be non-applicable.
- For engine dispatched between 01 Sep 2006 and 01 Apr 2011.
- Shelf life of 24 months.
- For engine dispatched after 01 Apr 2011.
- Shelf life 48 months.

mayphil

Perkins® Dealer

WARRANTY SECTION

INFORMATION REQUIRED TO COMPLETE A CLAIM

- Whether it is an engine, part or engine replacement claim.
- Complete engine serial number including build list.
- If a replacement engine then the new engine serial number an authorisation number.
- The answer to the following question:

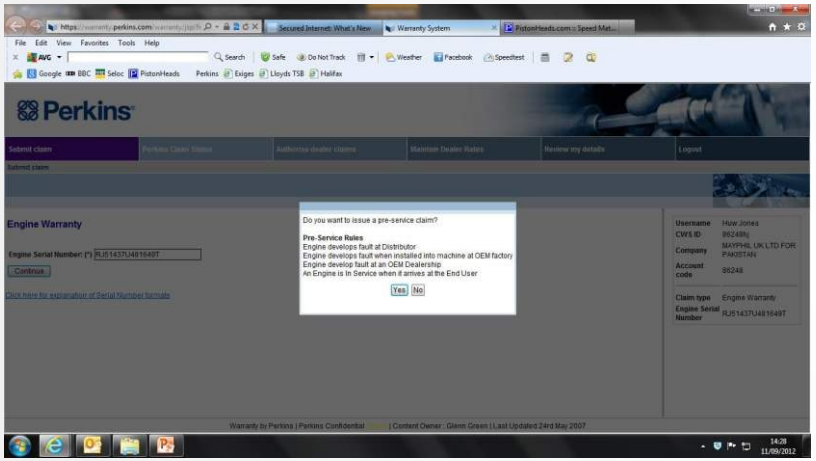

- Commission date.
- Failure date.
- Hours run.
- Customer details including address.
- Components used to carry out the repair.

- Component that caused the failure and what the failure was.
- If the component was available from stock
- Travel time and distance.
- Labour costs including engine removal if applicable.
- Additional costs.
- Repair date.

For any other questions and/or inquiries, please contact **Safi Engineering Services** at:

Telephone Nos:
0093(0)780 006 7000 / 0093(0)777 258 366
0093(0)799 258 366 / 0093(0)792 006 700

Skype:
safi.engineering

E-Mail:
mail@safieng.af

mayphil

Perkins Dealer

COPIES OF ALL PAST PERFORMANCE

SUMMARY OF RELEVANT CAPABILITY, EXPERIENCE AND PAST PERFORMANCE

Include projects that best illustrate your experience relevant to this (RFQ) or similar activities, sorted by decreasing order of completion date.

Projects should have been undertaken in the past three years (i.e. 2011, 2012 and 2013) Projects undertaken in the past five years may be taken into consideration at the discretion of the evaluation panel. and 2014

Item #	Project Title and Description of Activities	Location Province/District	Client Name/Tel #	Cost in US$	Start Dates	End Dates	Completed on Schedule (Yes/No)	Subcontractor or Prime Contractor?
1	Sold out 1 x 275 KVA Engine	Herat	UNOPS	24200	2014	2014	Yes	Prime
2	Sold 1 x 500 KVA	Kabul	IRD	55000	2013	2013	Yes	Prime
3	Sold 1 x 44 KVA	Kabul	Etisalat	13500	2014	2014	Yes	Prime

Saif Engineering Services ★ Spare Parts & Electrical Equipment ★ سیف انجینیرنگ

COPIES OF ALL PAST PERFORMANCE

SUMMARY OF RELEVANT CAPABILITY, EXPERIENCE AND PAST PERFORMANCE

Include projects that best illustrate your experience relevant to this (RFQ) or similar activities, sorted by decreasing order of completion date.

Projects should have been undertaken in the past three years (i.e. 2011, 2012 and 2013) Projects undertaken in the past five years may be taken into consideration at the discretion of the evaluation panel.

Item #	Project Title and Description of Activities	Location Province/District	Client Name/Tel #	Cost in US$	Start Dates	End Dates	Completed on Schedule (Yes/No)	Subcontractc or Prime Contractor?
1	Sold out 2 x 1100 KVA	Mazar-e- Sharif	TI – International	279,500.00	2011	2011	Yes	Prime
2	Sold Out 2 x 275 KVA 2x 150 KVA	KABUL	Creative USAID	122,580.00	2012	2012	YES	Prime
3	Sold out 2 x 500 KVA	Kabul	Ecolog International	112,000.00	2013	2014	Yes	Prime

Safi Engineering Services with 9-years experience in Generating power Operating all over Afghanistan we have more then 300 past performance.

PAST PERFORMANCE DETAILS

CONTRACT LETTERS

UNOPS

Purchase Order

Dispatch via Print

PO Number	Date	Revision	Page
UNOPS-0000427248	30/12/2013		1

Payment Terms	Freight / INCOTERMS	Ship Via
Net 30	DAP	Common

Buyer	Phone	Currency
Ajmal RAZI	Tel:	USD
AjmalR@unops.org	Fax:	

Approver
Mikko LAINEJOKI

UN Office For Project Services
Marmorvej 51
2100 Copenhagen
Denmark
Tel: +45 4533 5000
Fax: +45 4533 7501

Vendor: 0000130888
Safi Engineering Services
Banayi in front of ICT Kabul, Institute
Kabul
Afghanistan

Ship To: United Nations Office for Project Services
Afghanistan Operations Centre
UNOCA Compound, Jalalabad Road
UNOPS Office
Kabul
Afghanistan
Tel:
Fax:

Bill To: Marmorvej 51
2100 Copenhagen
Denmark
Tel: +45 4533 5000
Fax: +45 4533 7501

Ln-Sch	Item	Description	Quantity	UOM	Due Date	Unit Price	Line Total
1-1	OPS261116	Diesel generators	1.00	EA	15/01/2014	46,250.00	46,250.00

Brand new 500KVA Generator Engine including 1x Auto Start Load Share Control Module DSE 7510 model, delivery, installation and synchronization of the replaced engine with UNOPS existing power plant inclusive of all labour, material, equipment and tools charges

Public: Supply brand new 500KVA Perkins Generator Engine

Total PO Amount **USD** **46,250.00**

This Purchase Order can only be accepted by the Vendor returning an Acknowledgement of this Order or by timely delivery of the goods as herein specified. Acceptance of this Purchase Order shall effect a contract between the parties with the rights and obligations of each party governed solely by the terms of this Purchase Order, including all specifications and any special conditions, together with the UNOPS General Conditions, hereby incorporated by reference and available at WWW.UNOPS.ORG or upon request. No additional or different provisions proposed by the Vendor shall bind UNOPS unless agreed to in writing by a duly authorized official of UNOPS.

Important: All shipments, invoices and correspondance must show Purchase Order and Project Numbers.

Please acknowledge receipt of this Purchase Order, acceptance of the Terms and Conditions, and delivery date by signing below.

Acknowledgement:

Vendor signature and date

Authorized Signature

UNOPS AFGHANISTAN HEAD OF SUPPORT

UNOPS
AFGHANISTAN

Contract No: UNOPS/AGOC/RFQ/13/105-

Project: 00087679 – Support to Electoral Complaints Commission of Afghanistan

Amendment No.: 03

Date: June 26, 2014

Dear Sir,

With reference to the Contract dated November 29, 2013 and its first amendment dated 28 February 2014 and 2nd amendment dated 01 June, 2014 signed between **United Nations Office for Project Services ("UNOPS") Afghanistan** and **Safi Engineering Services,** for the provision of 2x of 350Kva generator sets on rental basis for IECC HQ office in Kabul – Afghanistan, and

WHEREAS UNOPS and Safi now wish to amend the said Contract in order to extend the validity of the contract for another1 (One) month period effective from **July 01, 2014 until July 31, 2014.**

WHEREAS such Amendment will result in an increase **of USD 6,000.00 (United States Dollars Six Thousand only)** making this amended Contract total **USD 48,800 (United States Dollars Forty Eight Thousand Eight Hundred Only).**

NOW THEREFORE, the relevant contract provisions indicated below are hereby amended to read as follows:

2. Period:

The Contractor shall commence the performance of the Services on **01 December 2013** and shall complete the Services by **31 July, 2014.**

3. Price and payment

In full consideration for satisfactory completion of the Services, UNOPS shall pay the Contractor a fixed contract price of **USD 48,800 (United States Dollars Forty Eight Thousand Eight Hundred Only).** The price of this contract is not subject to any adjustment or revision because of price currency fluctuation or the actual cost incurred by the contractor in the performance of the contract.
The Contractor shall submit invoices for the work done at the end of the month.

3.1 Invoices

UNOPS shall effect payments to the Contactor after acceptance by UNOPS of the original invoice and one copy for the appropriate amount together with whatever supporting documentation may be required by UNOPS within Thirty (30) days of receipt and acceptance of the invoice by UNOPS.

All other terms and conditions of the Contract, except as amended herein, shall remain unchanged and shall continue in full force and effect including the contractor Bank Details.

UNOPS/AGOC/RFQ/13/105-Amendment#3
UNOCA Compound Jalalabad Road P.O. Box 1772, Central Post Office Kabul, Afghanistan

PAST PERFORMANCE DETAILS

CONTRACT LETTERS

UNOPS
AFGHANISTAN

Sincerely yours,

Regina CARBONELL
Head of Support Services
United Nations Office for Project Services
Afghanistan Operational Hub

AGREED AND ACCEPTED

Signature:
Name: Massood shairy
Title: Admin Manager
Firm/company: Safi Engineering Services
Date: 30/06/2014

Safi Engineering Services ★ Spare Parts & Electrical Equipment

UNOPS/AGOC/RFQ/13/105-Amendment#3
UNOCA Compound Jalalabad Road P.O. Box 1772, Central Post Office Kabul, Afghanistan

Safi Engineering Services

Perkins Dealer

SES are Official an Appointed Perkins Master Dealer in Afghanistan
Perkins Genuine Parts Protect your Investment

Invoice

Invoice #:	10143-14	Date:	Wednesday, June 11, 2014
Invoice To:	UNOPS	Currency:	USD

Phone: 0093 (0) 752 017 149 | 0093 (0 0 | 0093 (0) 777 258 366
E-mail: mail@safieng.com | E-mail: mail@safieng.af | E-mail: info@safieng.com
Web: www.safieng.com | Web: www.safieng.af | Web: www.mayphil.com

275KVA NEW ENGINE

Item	DESCRIPTION	QUANTITY	UNIT PRICE	AMOUNT
	Brand New 275KVA Generator Engine			-
	Delivery and Installation			-
1	All Labour, Material, equipment and tools for the compleation of the job	1	24,200.00	24,200.00
			SUBTOTAL	24,200.00

UNOPS Services Rendered by/Goods Received On..... (date) Signature..... Name..... Job Title..... Date Signed 24/06/2014

Note: above items 100% Genuine Perkins UK
Safi Engineering Services is a symbol of trust and confidence by providing the best integrated services to our customer's incorporating latest technology with Powersolution at completive and economical price

Add: 1- Perkins Engine & Generators Sale Centre Jalalabad Road Banyi In front of ICIT Institute Kabul

Add: 2 - Perkins Part Center Habib Katazi Market Qui- Markaz Kabul Afghanistan

Thank You For Your Business

Add :3 - Full Perkins engine & Generator Sevices Centre Industrial Area Old 9 distract Street Jalal Abad Road

Safi Engineering Services ★ Spare Parts & Electrical Equipment

CONTRACT LETTERS

UNOPS

Rev.03, September, 2010

Afghanistan International Bank (AIB)

Beneficiary:	**Safi Engineering Services**
Account Number:	**0500102005069312**
Account with:	**Afghanistan International Bank**
SWIFT CODE:	**AFIBAFKA**
Intermediate Bank:	**Commerz Bank**
SWIFT CODE:	**COBADEFFXXX**
Account Number:	**400870105400 USD**

4. SPECIAL CONDITIONS:
No special conditions shall apply.

5. NOTIFICATIONS
For the purpose of notifications under the Contract, the addresses of UNOPS and the Contractor are as follows:

For UNOPS:	For the Contractor:
Mr. Davronbek Akhmadbekov	**Mr. Samiullah Noori**
Procurement & Supply Chain Manager	Operations Manager
UNOPS AFOH	Safi Engineering Services
UNOCA Compound , Jalalabad Road Kabul, Afghanistan +93 790 422770 davronbeka@unops.org	Jalalabad Road, Banyi, in front of ICIT Institute, Kabul, Afghanistan +93(0) 700 258 366 mail@safieng.com; info@safieng.com

Ref.: UNOPS/AGOC/RFQ/13/105

6. SUPERSEDING EFFECT
This Contract supersedes all prior oral agreements or written contract, if any, between the Contractor and UNOPS, constituting the entire agreement with respect to the Service.

In witness of these terms and conditions, the parties execute this Contract.

For and on behalf of UNOPS:	For and on behalf of the Contractor:
Signature	
Name: Paul CRUICKSHANK	Mr. Samiullah Noori
Title: Officer-in-Charge	Operations Manager
Date: 1.12.13	

© UNOPS

UNOPS
AFGHANISTAN

All other terms and conditions of the Contract, except as amended herein, shall remain unchanged and shall continue in full force and effect.

Sincerely yours,

Mikko Jarmo Klevi LAINEJOKI

Director and Representative
United Nations Office for Project Services
Afghanistan Operational Hub

AGREED AND ACCEPTED

Signature:

Name: Massoud Sharifi

Title: Admin Manager

Firm/company: Safi Engineering Services

Date: 27/02/2014

UNOCA Compound Jalalabad Road P.O. Box 1772, Central Post Office Kabul, Afghanistan
Email afg@unops.org |www.unops.org |UNOPS is ISO 9001 Certified

CONTRACT LETTERS

CHECCHI

Afghanistan Rule of Law Stabilization Program (RLS-I)
Informal Component

Mar 10, 2014

CERTIFICATE OF APPRECIATION

To Whom It May Concern,

This is to certify that **Safi Engineering Services** had contract with Checchi and Company Consulting, Inc. from **Sep, 2011** to **March 13, 2014** as Generator Provider.
The provided rental generators for Kabul main office and Jalalabad regional office for the mentioned period, the services for the generators was in a high standard of professionalism,

We want to express our appreciation in regard to our professional relationship.

Thank you for the assistance that you have graciously accorded to Checchi.

Sincerely,

Afghanistan Rule of Law (Informal Component)
USAID Contractor

Ghufranullah Hamdard
Operations Manager
Rule of Law Stabilization Program - Informal Component
USAID Contractor | Checchi and Company Consulting, Inc.
gnabi@checchiconsulting.com
+93 (0)797 20 40 71

House No. 270
4th District, Ansari Square, Second Street
Kabul, Afghanistan

CHECCHI

Rule of Law Stabilization (RLS)
Program Informal Component

GENERATOR LEASE AGREEMENT

Between

(Safi Engineering Services)
(Hereinafter called the Supplier)

and

Checchi and Company Consulting, Inc.-The Rule of Law Stabilization (RLS) Program
(Hereinafter called the Client)

Whereas the parties agree to the following:

1. Service

- Supply of 2 (two) 220/150 KVA generators in Kabul
- Installation of the generators
- Regular servicing of the generators
- Disconnection of the generators
- Picking up of the generators at the end of the agreement

2. Price

Price per Generator per month: US$2,300.00 for 220KVA
Price per Generator per month: US$1,900.00 for 150KVA
Total Monthly rent for both Generators: US$4,200.00

3. Contract Duration

The agreement is from September 16 to October 15, 2011. Notice of cancellation or modifications should be done in writing Two (2) days before the effectivity day.

4. Terms of Payment

The Payment shall be made on a monthly basis in advance on the first week of each month through wire transfer/ check to the Supplier's account upon review and receipt of an invoice.

5. Other conditions

The generators will remain property of Safi Engineering Services. In case of damage or misuse by the client, the client will pay for the relevant repairs.
If the Client's contract with USAID is cancelled at any time, the lease shall be terminated upon the date of cancellation of the Client's contract with USAID, and the Supplier shall refund to the Client the prorated portion of the advance rent paid. In that event the Client would give the Supplier a minimum of ten (10) days notice of cancellation.

IN WITNESS THEREOF, the parties hereto have hereunto subscribed their signatures on 17th day of September, 2011.

Supplier:

FARID SHOKORI
Managing Director

Date: 26/09/11

Client:

KELLY GAVAGAN
Chief of Party

Date: 22 Sep 2011

Afghanistan Rule of Law Stabilization (RLS) Program (Informal Component)
USAID Contractor

CONTRACT LETTERS

CHECCHI

Rule of Law Stabilization (RLS)
Program Informal Component

GENERATOR LEASE AGREEMENT

Between

(Safi Engineering Services)
(Hereinafter called the Supplier)

and

Checchi and Company Consulting, Inc.-The Rule of Law Stabilization (RLS) Program
(Hereinafter called the Client)

Whereas the parties agree to the following:

1. Service

- Supply of 2 (two) 220/150 KVA generators in Kabul
- Installation of the generators
- Regular servicing of the generators
- Disconnection of the generators
- Picking up of the generators at the end of the agreement

2. Price

Price per Generator per month: US$2,300.00 for 220KVA
Price per Generator per month: US$1,900.00 for 150KVA
Total Monthly rent for both Generators: US$4,200.00

3. Contract Duration

The agreement is from October 16, 2011 to July 15, 2012. Notice of cancellation or modifications should be done in writing Two (2) days before the effectivity day.

4. Terms of Payment

The Payment shall be made on a monthly basis in advance on the first week of each month through wire transfer/ check to the Supplier's account upon review and receipt of an invoice.

5. Other conditions

The generators will remain property of Safi Engineering Services. In case of damage or misuse by the client, the client will pay for the relevant repairs.
If the Client's contract with USAID is cancelled at any time, the lease shall be terminated upon the date of cancellation of the Client's contract with USAID, and the Supplier shall refund to the Client the prorated portion of the advance rent paid. In that event the Client would give the Supplier a minimum of ten (10) days notice of cancellation.

IN WITNESS THEREOF, the parties hereto have hereunto subscribed their signatures on 15th day of October, 2011.

Supplier:

FARID SHOKORI
Managing Director

Date: _____

Client:

KELLY GAVAGAN
Chief of Party

Date: _____

5. Other conditions

The generators will remain property of Safi Engineering Services. In case of damage or misuse by the client, the client will pay for the relevant repairs.
If the Client's contract with USAID is cancelled at any time, the lease shall be terminated upon the date of cancellation of the Client's contract with USAID, and the Supplier shall refund to the Client the prorated portion of the advance rent paid. In that event the Client would give the Supplier a minimum of ten (10) days notice of cancellation.

IN WITNESS THEREOF, the parties hereto have hereunto subscribed their signatures on 15th day of October, 2011.

Supplier:

FARID SHOKORI
Managing Director

Date: 16/10/11

House No. 149
4th District, Ansari Square, Second Sreet
Kabul, Afghanistan

Client:

KELLY GAVAGAN
Chief of Party

Checchi and Company Consulting, Inc. — Kabul, Afghanistan
Afghanistan Rule of Law Stabilization (RLS) Program (Informal Component) — USAID Contractor

Date: 16 Oct 2011

CONTRACT LETTERS

Requisition: ACE-Ops-G-GAHMADI-0433 *Engine oil and equipment filters for ACE office and guest house generators*

PURCHASE ORDER

PO Number: G-Kab-0094

Agricultural Credit Enhancement Program (ACE)
Project
House # 509, C8, Shura Street,
Kart-e-Seh Kabul, Afghanistan
Tel: +93-799-321-451
Fax: +93-700-050-878

Our order number must appear on all correspondence, invoices, packing lists, bills of lading, packages, etc.

Please see last page for any special instructions regarding this order

To:	Ship To:
Safi Engineering Services Cell: 0777258366 Email: mail@afieng.com Attn: Shamsullah	USAID Agriculture Credit Enhancement Program (ACE) House # 509, C8, Shura Street, Kart-e-Seh, Kabul, Afghanistan Contract Administrator: Ryan Vahid Schear Cell: +93 (0) 797 747 047, Email: ryan_schear@dai.com Attn:

Order Date	Date Required	Terms	Ship Via
05/20/2013	07/20/2013	Net 30 Days	Road

Item	Quantity	Description	Price AFS	Unit	Total Price AFS
1	5	Air Filter for 220 KVA Generator, Filter# Perkins 901-056	1,700.00	Each	8,500.00
2	12	Oil Filter#: Perkins 26540244	1,350.00	Each	16,200.00
3	12	Fuel Filter#: Perkins 26560137	820.00	Each	9,840.00
4	12	Water Filter#: Perkins 26550001	1,100.00	Each	13,200.00
5	2	Air Filter for 150 KVA Generator, Filter #: Perkins 901-054	1,370.00	Each	2,740.00
6	12	Oil Filter#: Perkins 2654403	250.00	Each	3,000.00
7	570	Engine Oil, ELF 20/50	160.00	Each	91,200.00

Terms

1. The items listed above will not be procured at once. ACE Procurement will issue order form as per need and procure the items. All request for items from the firm will be requested by official Goods Request form, kindly see attached Sample form. This form must be signed as approved and should be submitted to DAI Procurement along with invoice.
2. The payment will be made at the end of each month against the invoice submitted to ACE office, and the invoice should be submitted for the filters and Engine Oils ordered during the month based on the Goods/Service order form (Delivery upon order form).
3. Pursuant to Article 72 in the Afghanistan Tax Law effective March 21, 2009, DAI is required to withhold "contractor" taxes from the gross amounts payable to all Afghan for-profit subcontractors/vendors. In accordance with this requirement, DAI shall withhold two percent (2%) tax from all gross invoices to Afghan subcontractors/vendors under this Agreement with active AISA or Ministry of Commerce license. For subcontractors/vendors without active AISA or Ministry of Commerce license, DAI shall withhold seven percent (7%) "Contractor" taxes per current Afghanistan Tax Law.

Before the signing of this Agreement, the subcontractor/vendor will provide a copy of the organization's AISA or Ministry of Commerce license and TIN (Tax Identification Number). Amounts deducted from the invoices will be forwarded to the Ministry of Finance (MOF) Tax Division credited to the firm's TIN. Records of payments to the MOF shall be maintained on file with DAI.

Instructions and Conditions
1. If included, the attached terms and conditions are part of this purchase order.
2. Notify us immediately if unable to ship order complete by date specified.
3. Please acknowledge promptly upon receipt of order.
4. Shipping costs must be billed at actual cost.
5. Our purchase order number must appear on your invoice and all correspondence.
6. Seller warrants goods shipped produced in accordance with applicable provisions of Fair Labor Standards Act.

Other

AFS Sub Total: 144,680.00
AFS Total: 144,680.00

Safi Engineering Services ★ Spare Parts & Electrical Equipment ★ صافی انجینیرنگ

Authorized Signature

Vendor Acknowledgement/Acceptance Signature and Date

CONTRACT LETTERS

IRD

International Relief and Development

Engineering, Quality Assurance and Logistical Support (EQUALS)

2nd Amendment to Purchase Order # 2117

The International Relief & Development (IRD) Mission in Afghanistan and **Safi Engineering Services**, mutually agree to the following amendment to the Purchase Order # 2117 about Complete Overhaul of 500KVA Power Generator Perkin Engine awarded on November 15, 2013:

The provision of this amendment is effective for the following articles/clauses as of **15 January, 2014.**

Section D – Scope of work and approved budget and payment schedule:

Item Description:
Supply, Delivery and Installation of Crankshaft-2500 series for 500KVA Power Generator.
Price: USD 6,500.00

Original Contract Value: USD 31,532.80
Modified Contract Value after all Modifications: USD 38,032.80 /

Extended Period of Performance:
December 27, 2013 to January 27, 2014.

All other provisions of purchase order will remain unchanged and effective.

Agreed by both parties:

IRD Representative: Name: Paul Wolstenholme | Chief of Party

Signature: .....

Date: 15 Jan /2014

Contractor: Name: Safi Engineering Services

Signature: .....

Date: 15/01/2014

Witnesses: Name: CRAIG L. ROBINSON

Signature: .....

Date: 16 / JAN /2014

EQUALS Office
Shirpur
Kabul, Afghanistan
Tel: (+93) 0786 986 786

www.ird.org

1621 N. Kent St., 4th Floor
Arlington, VA 22209
Tel: +1703-248-0161
Fax: +1703-248-0194

ETISALAT AFGHANISTAN

Purchase order

Purchase ref PO/030696/2014 Date 7/24/2014 PR No: PR/026379/2014 PR Date: 7/16/2014

Vendor code: VDR03486
Vendor name ....: Safi Engineering Services
Attention .....:
.....:

RFQ No : .....:
RFQ Delivery Date:
Contract number .....:

Phone number .:
Email .....:

This Order is issued for supply of the Items/materials stipulated below based on your offe

Sr. No	Item code	Item description	Unit	Quantity	Unit price	Disc. pct.	TOTAL PRICE	Curr ency
1	ITM01256	DG Overhaul (New Brand Engine for 150 KVA DG with free transportation & mechanical service. Engine Model: YD 1006 Sries & Engine Number: 1006TAG2) - DG Overhaul - -	NOS	1	752,780.00	0.00	752,780.00	AFN
GRAND TOTAL :				1.000			752,780.00	

AMOUNT IN WOR *** Seven Hundred Fifty Two Thousand Seven Hundred Eighty and 00/100

purchase order term Vendor must confirm acceptance of this order with all terms and conditions to Etisalat within 48 hours maximum by signing staping and returning this copy as indicated below

Pavment Terms : 100% upon receipt & acceptance

Other Terms :
P.O has been issued as per attached committee report.
Delivery Period: Two days after P.O receipt.
Location: JLD MSC
Warranty Period: One (1) Year from the date of installation.
The Price is including Tax.
Contact Person: Abdul Saboor Sabbar

PENALTY FOR DELAY IN DELIVERY:
1% per week or any part thereof up to initial maximum delay of 5 weeks; then 2% per each subsequent week of delay, thereafter Etisalat Afghanistan may terminate order after total "10" weeks of delay and procure order on account of supplier.

Invoice submission : Contractor shall submit invoice and claim their payment after completion of their project and signing of good or services receipt note (GRN or SRN) within one month otherwise Etisalat Afghanistan will not process their payment and Invoice with copy of Purchase order and Goods Receipt Note (GRN)/Service Receipt Note (SRN) shall be submitted to "Head of Unit, Financial operation, Payment

Note : In case payment is not received by contractor within 30 days of submission of invoice, the contractor shall write to Procurement dept EA Head Office, Shahr-e-Naw, Kabul, Afghanistan with PO and

On Behalf of Etisalat :

Manager procurement : Approved by: for CHRSAO

Sign : 27-7-14

On Behif of Safi engineering Servic This order is duly accepted on : .....

Name : Suliman Designation Finance Manga Signature : Stamp :

Safi Engineering Services ★ Spare Parts & Electrical Equipment

PAST PERFORMANCE DETAILS

PREVIOUS CLIENT LIST

ARK CONSTRUCTION CO. INC.

Afghan Wireless

AZ Corporation

care

etisalat

EXELIS

J - TECH ENGINEERING

IRD International Relief & Development

KABUL LODGE

KARIZMATURK CONSTRUCTION & PAILIG CO. LTD.

M-TECH INTERNATIONAL

Park Mall پارک مال

RMA GROUP

روشن ROSHAN

SALLYPORT Enabling Global Operations

WICC

Technologists inc Building Strong Foundations

UNOPS

UNODC

صافی لاندمارك هوتل و سویتس SAFI LANDMARK HOTEL & SUITES

Safi Engineering Services Test Report of Generator set's steady performance

GB/T 2820. 0 -0 -2013

MODEL:		SERIAL NO:		PERFORMANCE CLASS		CUSTOMER:	
1.SPECIFICATION	Line Number/voltage:			Speed/ frequency		Rated current:	
2.INGINE	Ex.factory:	Perkins Engine		Model:		Serial No:	
3.ALTERNATOR	Ex.factory:	LEROYSOMER		Model:		Serial No:	
4.ENVIROMENT CONDITION							
Relative humidity:	50%	Environmental temperature:		10.8 ć		Atmosphe re:	100
Type of oil:		Type of fuel:			Circuit diagram:		
5.control system	Control model:		Serial No:		Switch Model:		Serial No:
6.CHECK EVERY INDICATION EQUIPMENT•S WORK CONDITION OF CONTROL SCREEN							
Over speed stop:		High water temperature:			Emergency stop:		
Low oil pressure protection:		Battery charging					

7.LOAD TEST

LOAD%	LOAD POWER (KVA)	Voltage (V)			Amper (A)			STEADT POWER FACTOR	FREQUENCY (Hz)	Water temperature (ć)	Oil temperature (BAR	TIME (Minute)	Remark
		AB	CA	BC	A	B	C						
0%													
25%													
50%													
75%													
100%													
110%													
100%													
75%													
50%													
25%													
0%													

8.50% Rated power load moment capability:

9. Starting capability in normal temperature (starting machine three times every 2 Mine):

Conclusion:		
Tester SES Engineer	Safi Engine Director	Approve red Official Staff

BANK STATEMENT

- BENEFICIARY: **Safi Engineering Services**
  ACCOUNT NUMBER: **0500102005069312**
  ACCOUNT WITH: **Afghanistan International Bank (AIB)**
  SWIFT CODE: **AFIBAFKA**
  INTERMEDIATE BANK: **Commerz Bank**
  SWIFT CODE: **COBADEFFXXX**
  ACCOUNT NUMBER: **400870105400 USD**

AIB بانك بين المللى افغانستان
AFGHANISTAN INTERNATIONAL BANK

PAYMENT INSTRUCTION FOR INWARD REMITTANCES

For receiving inward remittances into your account with Afghanistan International Bank we advice you to forward the following payment instruction to your business partners:

For USD (Commerz Bank)

Beneficiary:	**Safi Engineering Services**
Account number:	**0500102005069312**
Account with:	**Afghanistan International Bank (AIB)**
SWIFT CODE:	**AFIBAFKA**
Intermediate Bank:	**Commerz Bank**
SWIFT CODE:	**COBADEFFXXX**
Account Number:	**400870105400 USD**

IBAN numbers are not used for any inward transfer of fund to Afghanistan.
IBAN numbers are not used for correspondent relationship accounts, the above mentioned instructions should suffice for fluent international payment flows.

AFGHANISTAN INTERNATIONAL BANK
Shahr-e- Naw, Haji Yaqoob Square, Shahabudin Watt,
P.O.Box No, 2074 Kabul – Afghanistan
Tel: +93 (0) 20 255 0 255
Fax: +93 (0) 20 225 0 256
www.aib.af

BANK DETAILS

BANK FINANCIAL REPORTS

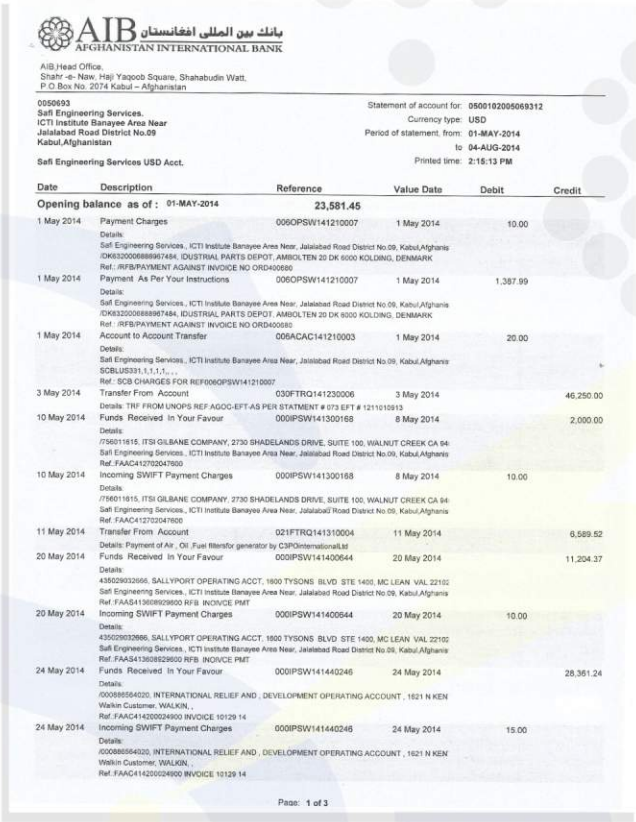

AIB بانك بين المللى افغانستان
AFGHANISTAN INTERNATIONAL BANK

AIB,Head Office,
Shahr -e- Naw, Haji Yaqoob Square, Shahabudin Watt,
P.O Box No. 2074 Kabul – Afghanistan

0050693
Safi Engineering Services.
ICTI Institute Banayee Area Near
Jalalabad Road District No.09
Kabul,Afghanistan

Statement of account for: 05001020050693312
Currency type: USD
Period of statement, from: 01-MAY-2014
to 04-AUG-2014
Printed time: 2:15:13 PM

Safi Engineering Services USD Acct.

Date	Description	Reference	Value Date	Debit	Credit
Opening balance as of : 01-MAY-2014		23,581.45			
1 May 2014	Payment Charges	006OPSW141210007	1 May 2014	10.00	
	Details: Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis /DK63200068886967484, IDUSTRIAL PARTS DEPOT, AMBOLTEN 20 DK 6000 KOLDING, DENMARK Ref.: /RFB/PAYMENT AGAINST INVOICE NO ORD400680				
1 May 2014	Payment As Per Your Instructions	006OPSW141210007	1 May 2014	1,387.99	
	Details: Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis /DK63200068886967484, IDUSTRIAL PARTS DEPOT, AMBOLTEN 20 DK 6000 KOLDING, DENMARK Ref.: /RFB/PAYMENT AGAINST INVOICE NO ORD400680				
1 May 2014	Account to Account Transfer	005ACAC141210003	1 May 2014	20.00	
	Details: Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis SCBLUS331,1,1,1,1,,, Ref.: SCB CHARGES FOR REF006OPSW141210007				
3 May 2014	Transfer From Account	030FTRQ141230006	3 May 2014		46,250.00
	Details: TRF FROM UNOPS REF AGOC-EFT-AS PER STATMENT # 073 EFT # 1211010913				
10 May 2014	Funds Received In Your Favour	000IPSW141300168	8 May 2014		2,000.00
	Details: /756011615, ITSI GILBANE COMPANY, 2730 SHADELANDS DRIVE, SUITE 100, WALNUT CREEK CA 94 Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:FAAC412702047600				
10 May 2014	Incoming SWIFT Payment Charges	000IPSW141300168	8 May 2014	10.00	
	Details: /756011615, ITSI GILBANE COMPANY, 2730 SHADELANDS DRIVE, SUITE 100, WALNUT CREEK CA 94 Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:FAAC412702047600				
11 May 2014	Transfer From Account	021FTRQ141310004	11 May 2014		6,589.52
	Details: Payment of Air , Oil ,Fuel filtersfor generator by C3POInternationalLtd				
20 May 2014	Funds Received In Your Favour	000IPSW141400644	20 May 2014		11,204.37
	Details: 435029032666, SALLYPORT OPERATING ACCT, 1600 TYSONS BLVD STE 1400, MC LEAN VAL 22102 Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:FAAS413608929600 RFB INOVICE PMT				
20 May 2014	Incoming SWIFT Payment Charges	000IPSW141400644	20 May 2014	10.00	
	Details: 435029032666, SALLYPORT OPERATING ACCT, 1600 TYSONS BLVD STE 1400, MC LEAN VAL 22102 Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:FAAS413608929600 RFB INOVICE PMT				
24 May 2014	Funds Received In Your Favour	000IPSW141440246	24 May 2014		28,361.24
	Details: /0008865864020, INTERNATIONAL RELIEF AND , DEVELOPMENT OPERATING ACCOUNT , 1621 N KEN Watkin Customer, WALKIN, , Ref.:FAAC414200024900 INVOICE 10129 14				
24 May 2014	Incoming SWIFT Payment Charges	000IPSW141440246	24 May 2014	15.00	
	Details: /0008865864020, INTERNATIONAL RELIEF AND , DEVELOPMENT OPERATING ACCOUNT , 1621 N KEN Watkin Customer, WALKIN, , Ref.:FAAC414200024900 INVOICE 10129 14				

Page: 1 of 3

AIB بانك بين المللى افغانستان
AFGHANISTAN INTERNATIONAL BANK

AIB,Head Office,
Shahr -e- Naw, Haji Yaqoob Square, Shahabudin Watt,
P.O Box No. 2074 Kabul – Afghanistan

0050693
Safi Engineering Services.
ICTI Institute Banayee Area Near
Jalalabad Road District No.09
Kabul,Afghanistan

Statement of account for: 05001020050693312
Currency type: USD
Period of statement, from: 01-MAY-2014
to 04-AUG-2014
Printed time: 2:15:13 PM

Safi Engineering Services USD Acct.

Date	Description	Reference	Value Date	Debit	Credit
26 May 2014	Cheque Deposit	006LOCH141460002	26 May 2014		418.00
	Details: Cheque # 531247 is cash and deposid by Mr. Mahboobullah in A/C of Safi Engineering Services A/C -				
26 May 2014	Cheque Deposit	006LOCH141460004	26 May 2014		10,941.00
	Details: Cheque # 70849 is cash and deposid by Mr. Mahboobullah in A/C of Safi Engineering Services A/C 0				
26 May 2014	Payment Charges	006OPSW141460501	26 May 2014	85.63	
	Details: /05001020050693312, Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District I /GB87MIDL40273471044516, MAYPHIL , GOATMILL ROAD DOWLAIS MERTHYR TYDFI, LL MIDGLAMOF Ref.:006OPSW141460501 /RFB/PAYMENT REGARDING INVOICE NO U 106258				
26 May 2014	Payment As Per Your Instructions	006OPSW141460501	26 May 2014	57,093.03	
	Details: /05001020050693312, Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District I /GB87MIDL40273471044516, MAYPHIL , GOATMILL ROAD DOWLAIS MERTHYR TYDFI, LL MIDGLAMOF Ref.:006OPSW141460501 /RFB/PAYMENT REGARDING INVOICE NO U 106258				
28 May 2014	Cash Withdrawal	006CHWL141480213	28 May 2014	1,000.00	
	Details: Cash Withdrawal by Mr Shamsullah				
28 May 2014	Account to Account Transfer	000ACAC141480131	28 May 2014	56.84	
	Details: Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis COBADEFF,,, Ref.:000ACAC141480131 COMMERZ BANK CHARGES FOR BEING OUR REF#006OPSW141460501				
29 May 2014	Cheque Cashed	006CQWL141490018	29 May 2014	4,000.00	
	Details: Cheque#468407 is cashed by Mr.Mahboobullah Ita#2043029				
31 May 2014	Salary Transfer	000PAYR141510332	31 May 2014		862.00
	Details: Internal Account for Processing Cus, , , Safi Engineering Services USD Acct., , Ref.:024018120P0729930 SALARY BY UNAMA				
31 May 2014	Monthly Account Maintenance Charge	000MMCGUSD 00001	1 Jun 2014	2.62	
	Details:				
9 Jun 2014	Cheque book issuance charge	000CQBIUSD 00001	10 Jun 2014	12.00	
	Details:				
16 Jun 2014	Charges	0000192141570011	16 Jun 2014	12.00	
	Details: New cheque book issuing charges dtd:02/04/2014 .				
26 Jun 2014	Cheque Cashed	006CQWL141770039	26 Jun 2014	1,480.00	
	Details: Cho# 465437 is cashed by Mr Sanaullah Taza# 4025809				
30 Jun 2014	Monthly Account Maintenance Charge	000MMCGUSD 00001	1 Jul 2014	2.62	
	Details:				
7 Jul 2014	Transfer From Account	021FTRQ141880004	7 Jul 2014		7,299.04
	Details: FTRQ				
7 Jul 2014	Cheque Cashed	000CQWL141880049	7 Jul 2014	900.00	
	Details: Cheque # 338499 is Cashed By Mr. Nasibullah NID# 5959				
7 Jul 2014	Transfer From Account	021FTRQ141880008	7 Jul 2014		10,000.00
	Details: Payment of Advance by C3PO international Ltd				
23 Jul 2014	Funds Received In Your Favour	000IPSW142040530	23 Jul 2014		42,800.00
	Details: 0037521915 23, UNDP, MARMOREJ 51, 2100 COPENHAGEN Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:201407210021227 4 RFB 1800448609 BRANCHID MAIN				

Page: 2 of 3

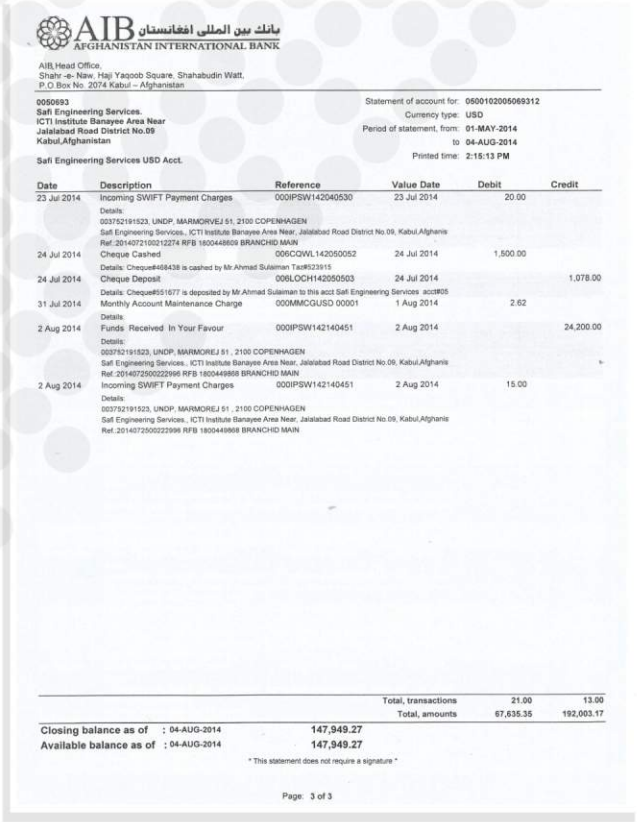

AIB بانك بين المللى افغانستان
AFGHANISTAN INTERNATIONAL BANK

AIB,Head Office,
Shahr -e- Naw, Haji Yaqoob Square, Shahabudin Watt,
P.O Box No. 2074 Kabul – Afghanistan

0050693
Safi Engineering Services.
ICTI Institute Banayee Area Near
Jalalabad Road District No.09
Kabul,Afghanistan

Statement of account for: 05001020050693312
Currency type: USD
Period of statement, from: 01-MAY-2014
to 04-AUG-2014
Printed time: 2:15:13 PM

Safi Engineering Services USD Acct.

Date	Description	Reference	Value Date	Debit	Credit
23 Jul 2014	Incoming SWIFT Payment Charges	000IPSW142040530	23 Jul 2014	20.00	
	Details: 0037521915 23, UNDP, MARMOREJ 51, 2100 COPENHAGEN Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:201407210021227 4 RFB 1800448609 BRANCHID MAIN				
24 Jul 2014	Cheque Cashed	006CQWL142050052	24 Jul 2014	1,500.00	
	Details: Cheque#468438 is cashed by Mr.Ahmad Sulaiman Taz#523915				
24 Jul 2014	Cheque Deposit	006LOCH142050503	24 Jul 2014		1,078.00
	Details: Cheque#551677 is deposited by Mr.Ahmad Sulaiman to this acct Safi Engineering Services acct#05				
31 Jul 2014	Monthly Account Maintenance Charge	000MMCGUSD 00001	1 Aug 2014	2.62	
	Details:				
2 Aug 2014	Funds Received In Your Favour	000IPSW142140451	2 Aug 2014		24,200.00
	Details: 0037521915 23, UNDP, MARMOREJ 51, 2100 COPENHAGEN Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:201407250022299 6 RFB 1800449868 BRANCHID MAIN				
2 Aug 2014	Incoming SWIFT Payment Charges	000IPSW142140451	2 Aug 2014	15.00	
	Details: 0037521915 23, UNDP, MARMOREJ 51, 2100 COPENHAGEN Safi Engineering Services., ICTI Institute Banayee Area Near, Jalalabad Road District No.09, Kabul,Afghanis Ref.:201407250022299 6 RFB 1800449868 BRANCHID MAIN				
			Total, transactions	21.00	13.00
			Total, amounts	67,635.35	192,003.17
Closing balance as of : 04-AUG-2014		147,949.27			
Available balance as of : 04-AUG-2014		147,949.27			

* This statement does not require a signature *

Page: 3 of 3

CONCLUSION

Safi Engineering Services is a symbol of trust and confidence by providing the best integrated services to our customer's incorporating latest Technology and technical support with Power solution at completive and economical price.

We promise we are doing the best service in all over Afghanistan this is our grantee our company registered with official license from AISA, Peace dividend Market place, UN global Marking, World Bank, our staff national and international qualified staff, Mechanic Engineer, Electrical Engineer, Hr, Marketing and IT with security in center of Kabul, we will service and supply all over Afghanistan.

Thank you very much and most appreciate for selecting Safi Engineering Services.

Address:
Safi Engineering Services
Perkins Part Centre Second Floor
Habib Katawazi Market,
Qwui Markaz, Kabul,
Afghanistan

Telephone Nos:
0093(0)780 006 700
0093(0)777 258 366
0093(0)799 258 366
0093(0)792 006 700

Skype:
safi.engineering

E-Mail:
mail@safieng.af

Website:
www.safieng.af

In partnership with:

mayphil

www.mayphil.com.uk

Perkins® Dealer

www.perkins.com

www.safieng.af
Telephone Nos:
0093(0)780 006 7000 - 777 258 366 - 799 258 366 - 792 006 700
Skype:
safi.engineering
E-Mail:
mail@safieng.af